

Depth (feet)	V _s (feet/sec)	V _p (feet/sec)
502.0	2270	6540
503.6	2400	6670
505.3	2080	6600
506.9	2080	6600
508.5	2190	6410
510.2	1840	6230
511.8	1690	6230
513.5	1920	6290
515.1	1870	6120
516.7	1870	6120
518.4	1870	6120
520.0	1950	6350
521.7	1940	6290
523.3	1810	6170
524.9	1790	6120
526.6	1890	6290
528.2	2100	6290
529.9	1760	6120
531.5	1370	5950
533.1	1460	6230
534.8	1760	6670
536.4	2000	6800
538.1	2000	6800
539.7	1860	7020
541.3	1940	6600
543.0	1930	6410
544.6	1840	6230
546.3	1800	6290
547.9	1810	6410
549.5	1840	6410
551.2	1560	6290
552.8	1420	6060
554.5	1410	6170
556.1	1370	6120
557.7	1360	6060
559.4	1370	6060
561.0	1560	6120
562.7	1780	6230
564.3	1740	6230
565.9	1750	6290
567.6	1740	6350
569.2	1670	6350
570.9	1540	6350
572.5	1630	6350
574.2	1860	6350
575.8	1900	6410
577.4	1830	6350
579.1	1980	6470
580.7	1950	6870
582.4	2000	6940

Depth (feet)	V _s (feet/sec)	V _p (feet/sec)
584.0	2080	7020
585.6	2120	7020
587.3	2110	7090
588.9	2120	6940
590.6	2060	6870
592.2	2040	6870
593.8	2060	6800
595.5	1960	6540
597.1	2000	6470
598.8	2040	6410
600.4	1940	6290

Table 13, continued. Boring B-2274A OFFSET, Suspension R1-R2 depths and P- and S_H-wave velocities

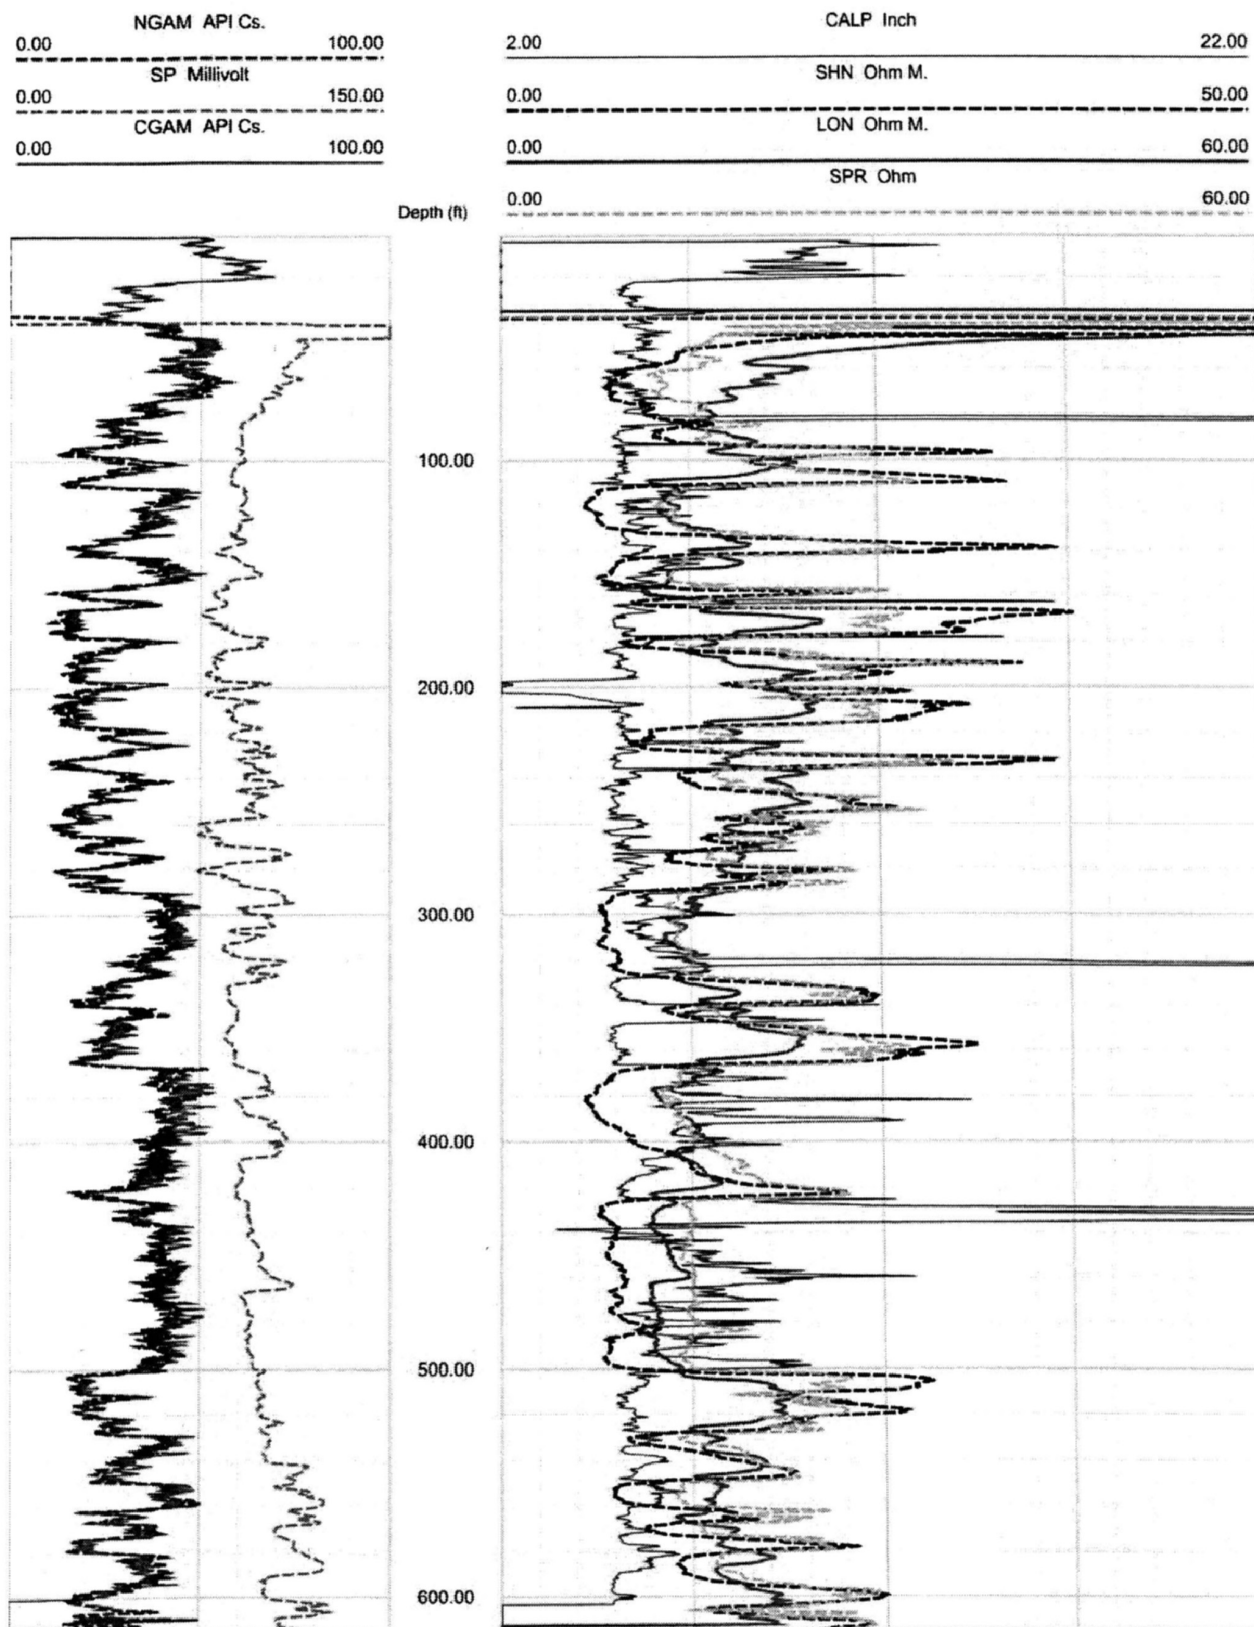


Figure 25. Boring B-2274A OFFSET, Caliper, Natural gamma, Resistivity and SP logs

VICTORIA COUNTY COL BORING B-2276A OFFSET **Receiver to Receiver V_s and V_p Analysis**

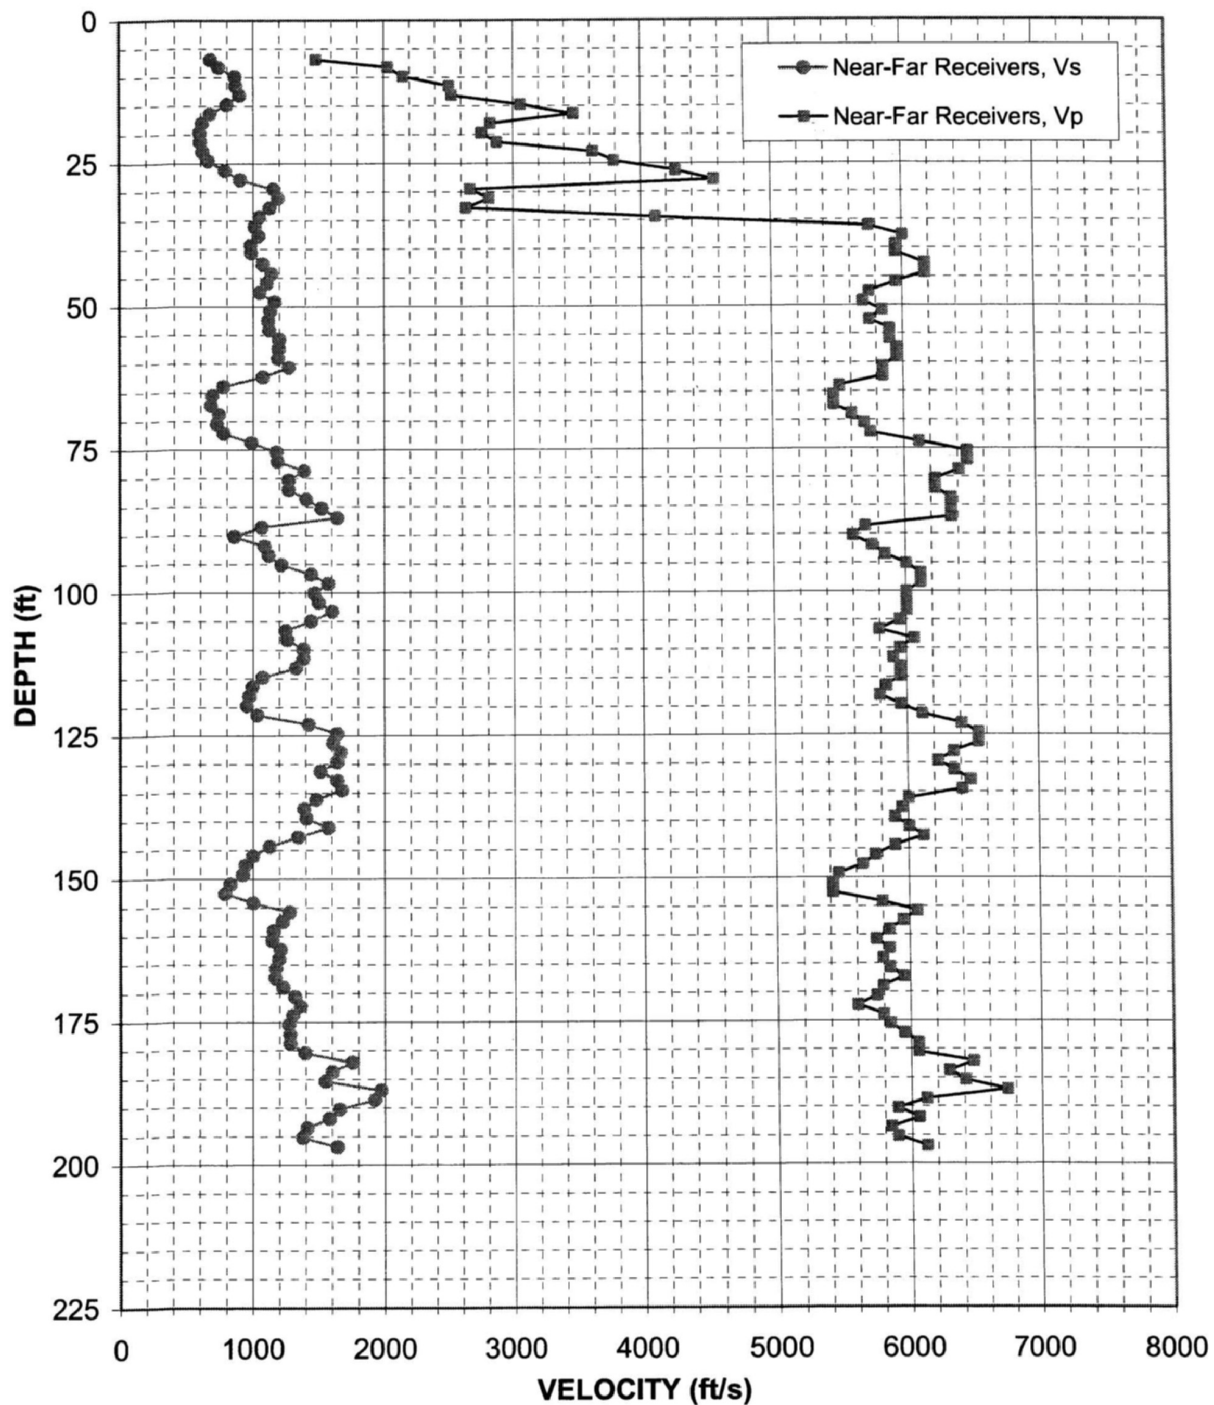


Figure 26: Boring B-2276A OFFSET, Suspension R1-R2 P- and S_H -wave velocities

Depth (feet)	V _s (feet/sec)	V _p (feet/sec)	Depth (feet)	V _s (feet/sec)	V _p (feet/sec)	Depth (feet)	V _s (feet/sec)	V _p (feet/sec)
6.9	670	1480	88.6	1060	5700	170.6	1320	5750
8.2	740	2030	90.2	860	5600	172.2	1360	5600
9.8	860	2150	91.9	1090	5750	173.9	1300	5800
11.5	870	2510	93.5	1120	5850	175.5	1270	5850
13.1	890	2530	95.1	1220	6010	177.2	1280	5950
14.8	800	3060	96.8	1440	6120	178.8	1280	6060
16.4	670	3470	98.4	1570	6120	180.5	1390	6060
18.0	610	2820	100.1	1470	6010	182.1	1750	6470
19.7	590	2750	101.7	1500	6010	183.7	1600	6290
21.3	600	2870	103.4	1600	6010	185.4	1550	6410
23.0	610	3620	105.0	1440	5950	187.0	1970	6730
24.6	660	3790	106.6	1250	5800	188.7	1930	6120
26.3	780	4270	108.3	1260	6060	190.3	1660	5900
27.9	900	4570	109.9	1380	5950	191.9	1580	6060
29.5	1160	2670	111.6	1380	5900	193.6	1410	5850
31.2	1190	2810	113.2	1330	5950	195.2	1380	5900
32.8	1130	2640	114.8	1070	5950	196.9	1640	6120
34.5	1050	4120	116.5	1000	5850			
36.1	1010	5750	118.1	970	5800			
37.7	1040	6010	119.8	950	5950			
39.4	980	5950	121.4	1030	6120			
40.7	980	5950	123.0	1420	6410			
42.7	1080	6170	124.7	1640	6540			
44.3	1140	6170	126.3	1610	6540			
45.9	1100	5950	128.0	1670	6350			
47.6	1050	5750	129.6	1640	6230			
49.2	1170	5700	131.2	1520	6350			
50.9	1130	5850	132.9	1640	6470			
52.5	1110	5750	134.5	1680	6410			
54.1	1120	5900	136.2	1480	6010			
55.8	1200	5900	137.8	1390	5950			
57.4	1190	5950	139.4	1410	5900			
59.1	1190	5950	141.1	1570	6010			
60.7	1270	5850	142.7	1340	6120			
62.3	1070	5850	144.4	1130	5900			
64.0	770	5510	146.0	1000	5750			
65.6	690	5460	147.6	940	5650			
67.3	680	5460	149.3	920	5460			
68.9	740	5600	150.9	830	5420			
70.5	720	5700	152.6	790	5420			
72.2	780	5750	154.2	1000	5800			
73.8	990	6120	155.8	1280	6060			
75.5	1180	6470	157.5	1230	5950			
77.1	1190	6470	159.1	1160	5850			
78.7	1390	6410	160.8	1150	5750			
80.4	1270	6230	162.4	1210	5850			
82.0	1270	6230	164.0	1200	5800			
83.7	1410	6350	165.7	1170	5850			
85.3	1520	6350	167.3	1170	5950			
86.9	1640	6350	169.0	1230	5800			

Table 14. Boring B-2276A OFFSET, Suspension R1-R2 depths and P- and S_H-wave velocities

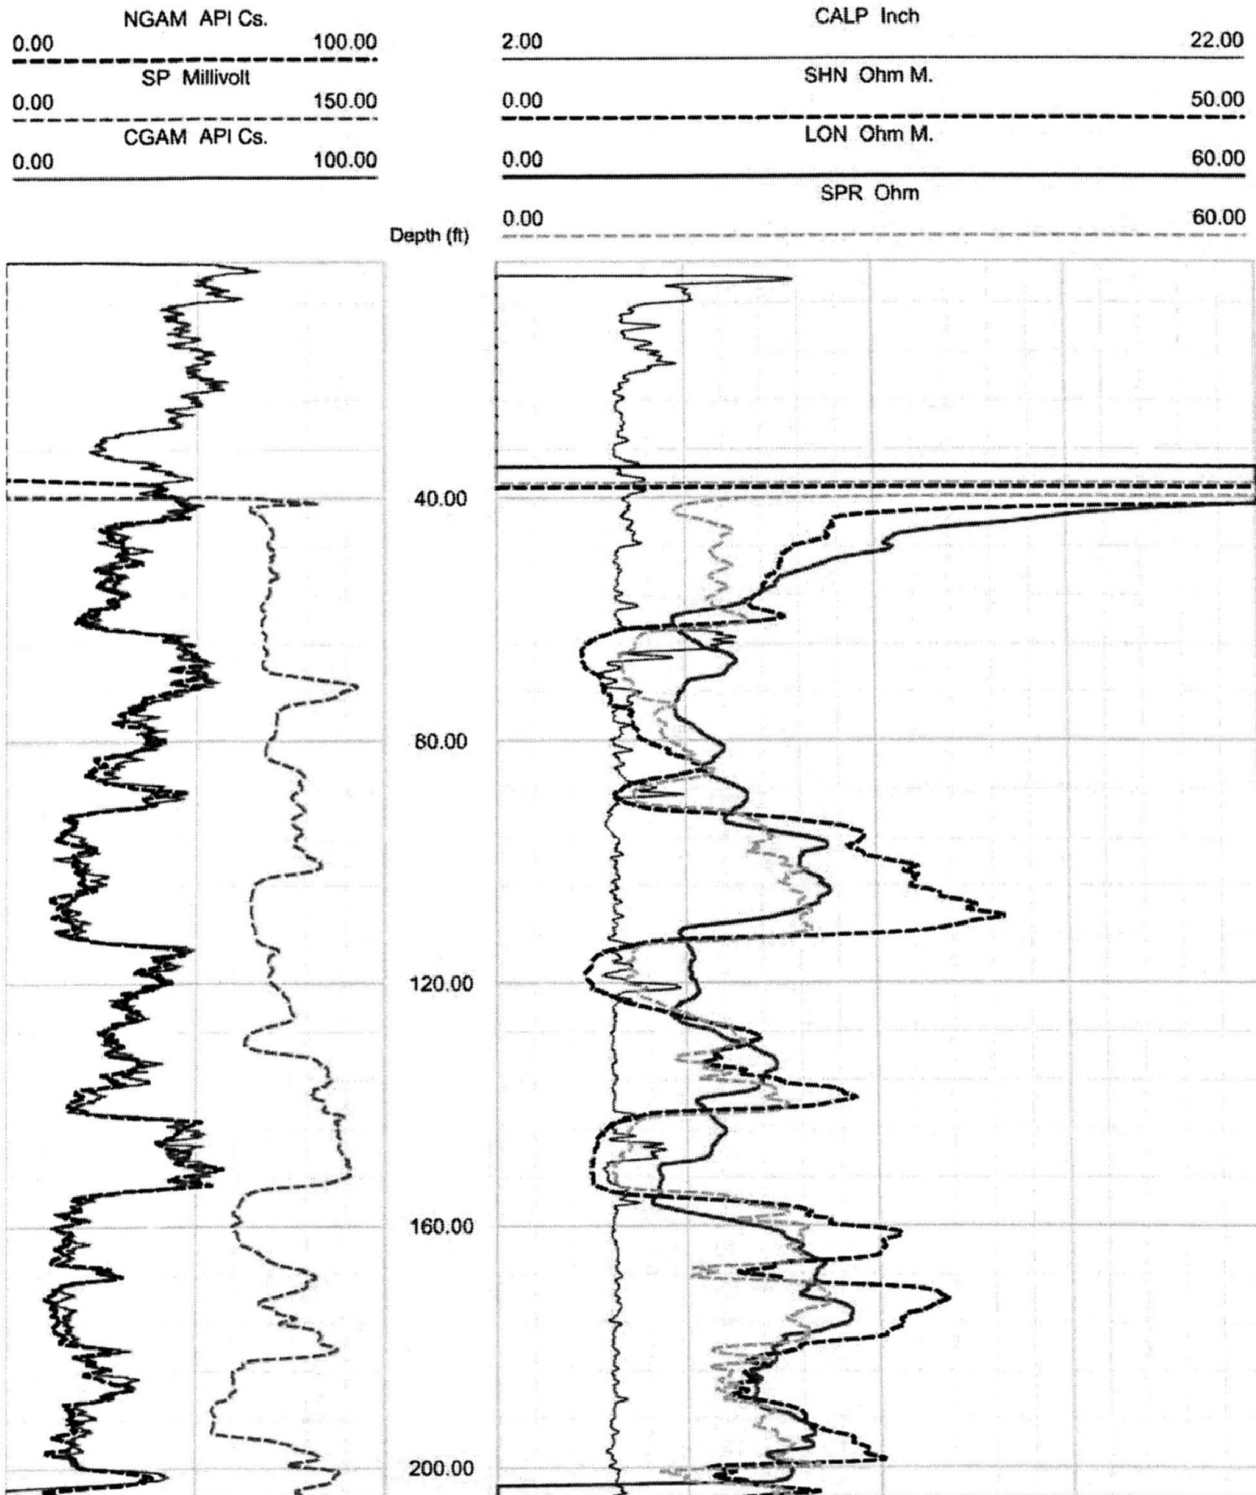


Figure 27. Boring B-2276A OFFSET, Caliper, Natural gamma, Resistivity and SP logs

Deviated borehole in orthographic projection, viewed from N332

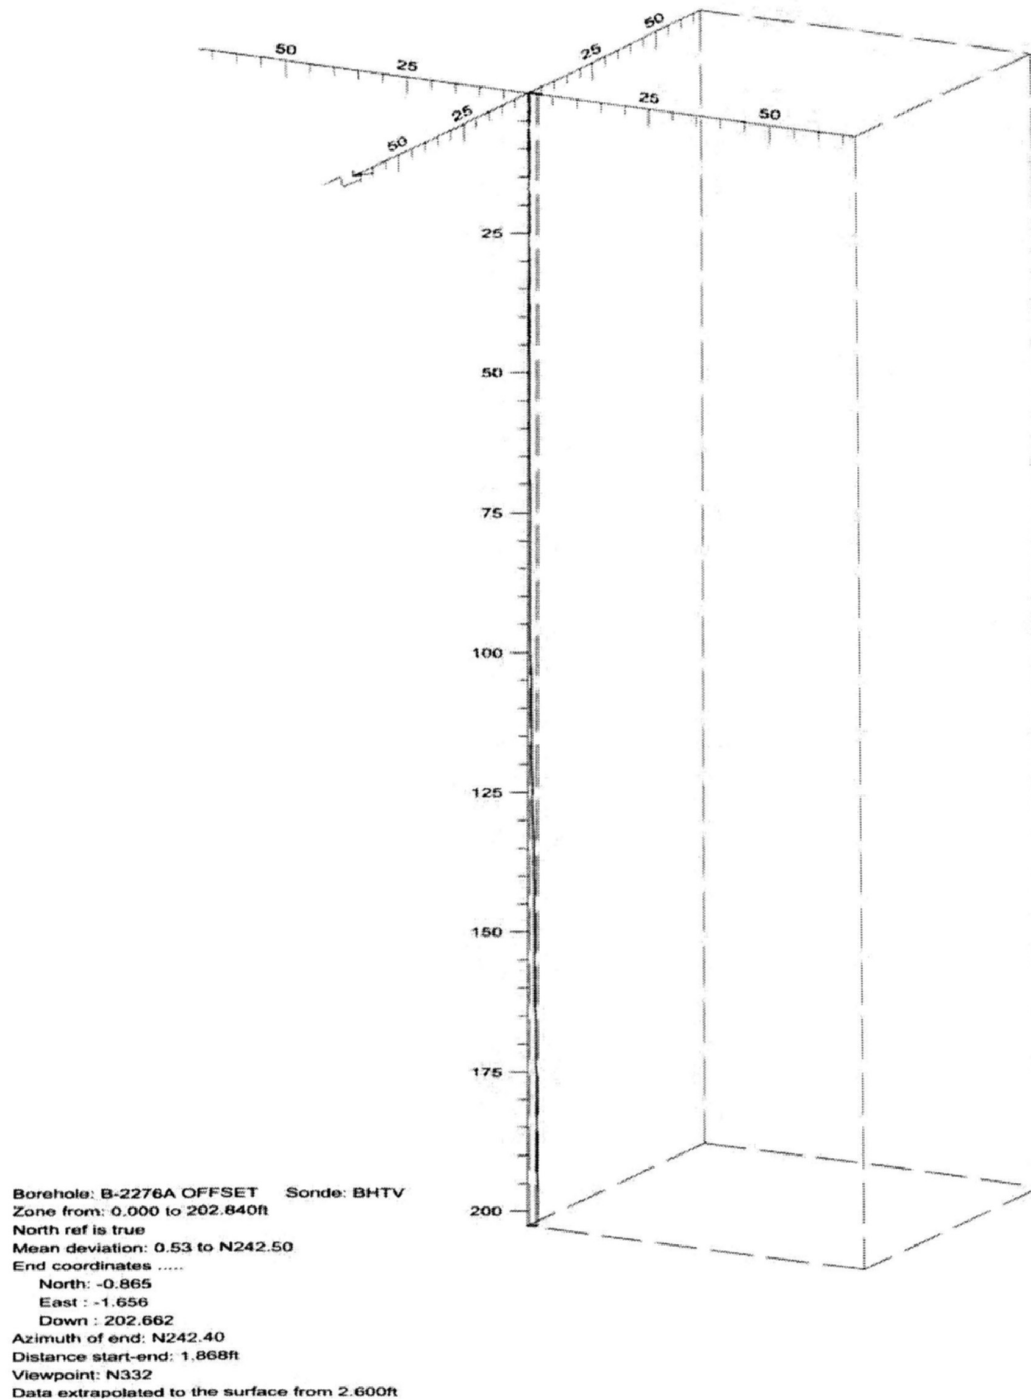


Figure 28. Boring B-2276A OFFSET, Deviation Projection (dimensions in feet)

VICTORIA COUNTY COL BORING B-2282A OFFSET Receiver to Receiver V_s and V_p Analysis

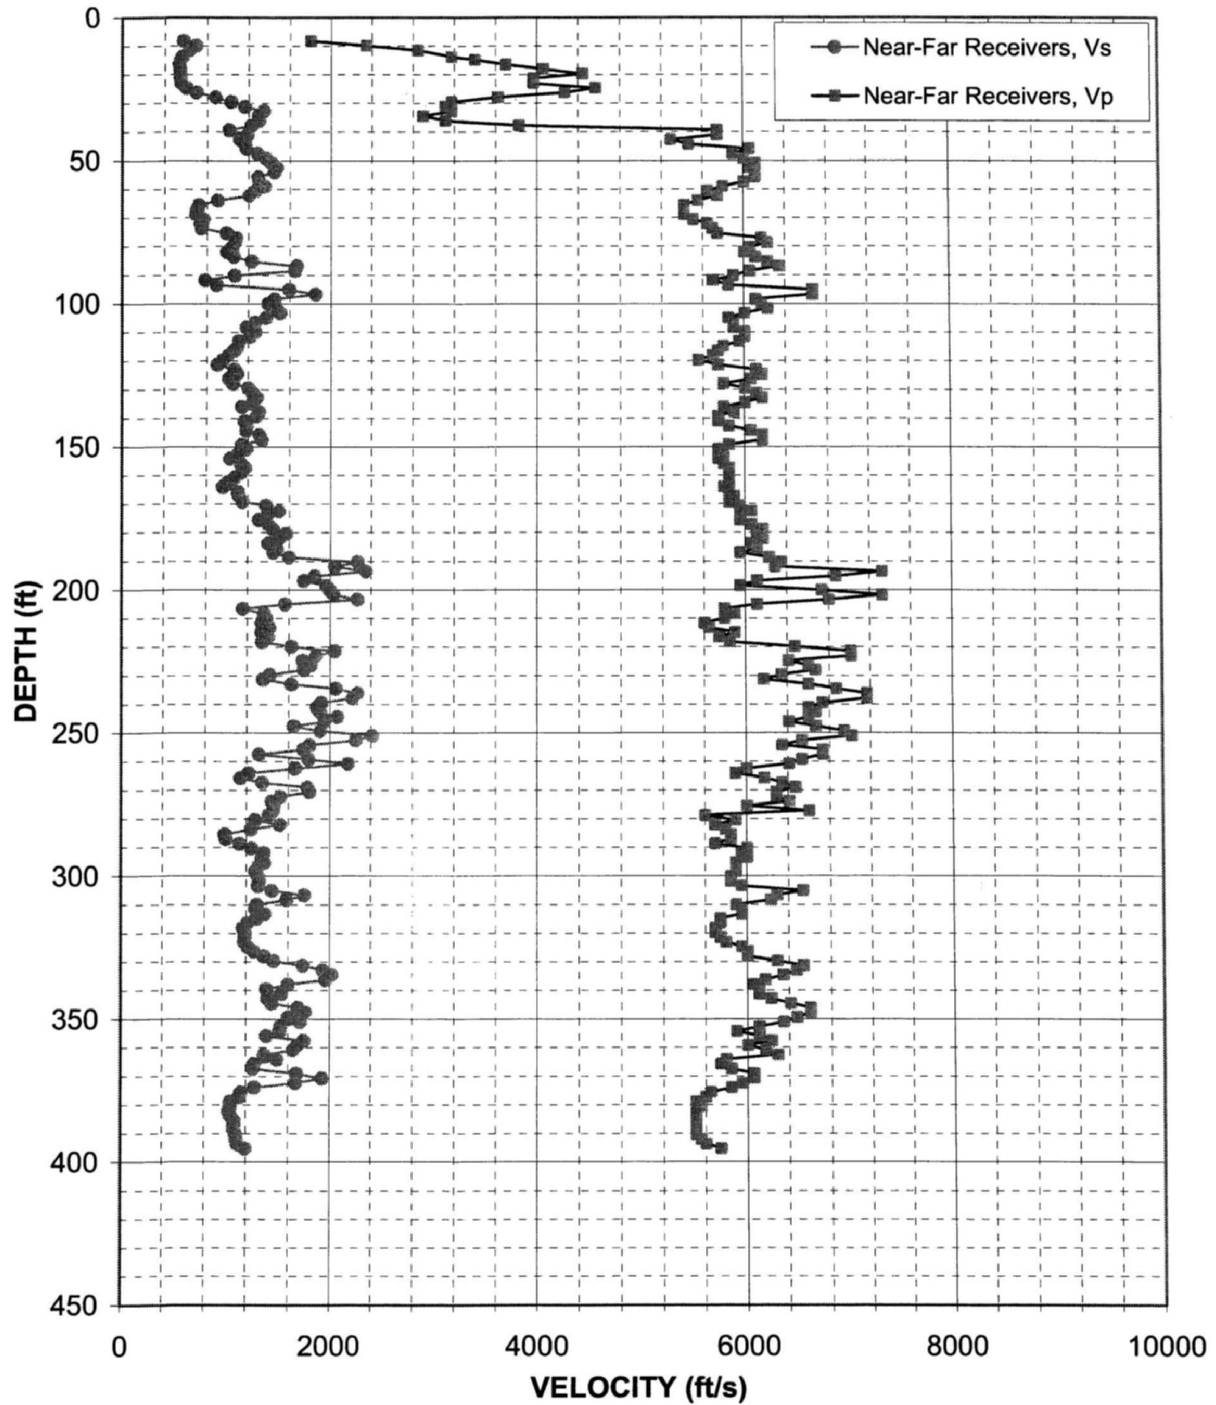


Figure 29: Boring B-2282A OFFSET, Suspension R1-R2 P- and S_H -wave velocities

Depth (feet)	V _s (feet/sec)	V _p (feet/sec)	Depth (feet)	V _s (feet/sec)	V _p (feet/sec)	Depth (feet)	V _s (feet/sec)	V _p (feet/sec)
8.2	570	1800	90.2	1070	5900	172.6	1500	6060
9.8	690	2350	91.9	790	5700	173.9	1390	5950
11.5	630	2850	93.5	900	5850	175.5	1310	5950
13.8	560	3170	95.1	1590	6670	177.2	1400	6060
14.8	540	3400	96.8	1850	6670	178.8	1440	6170
16.4	530	3700	98.4	1460	6120	180.5	1570	6120
18.0	540	4070	100.1	1390	6170	182.1	1500	6170
19.7	540	4440	101.7	1470	6230	183.7	1400	6060
21.3	540	3970	103.4	1510	6010	185.7	1480	6120
23.0	550	3970	105.0	1370	5850	187.0	1450	5950
24.6	600	4570	106.6	1270	5900	188.7	1600	6230
26.3	700	4270	108.3	1180	5900	190.3	2270	6350
27.9	880	3620	109.9	1270	6010	191.9	2040	6290
29.5	1030	3170	111.6	1220	6010	193.6	2350	7330
31.2	1160	3120	113.2	1110	5950	195.2	1850	6870
32.8	1350	3170	114.8	1100	5800	196.9	1750	6120
34.5	1300	2900	116.5	1060	5750	198.5	1960	5950
36.1	1300	3120	118.1	1010	5700	200.1	2000	6730
37.7	1230	3830	119.8	960	5560	201.8	2030	7330
39.4	1010	5750	121.4	900	5750	203.4	2270	6800
41.0	1190	5750	123.0	1070	6120	205.1	1560	6120
42.7	1110	5290	124.7	1100	6170	206.7	1160	5800
44.3	1170	5460	126.3	1020	6060	208.3	1360	5900
45.9	1180	6060	128.0	1050	5800	210.0	1380	5800
47.6	1290	5900	129.6	1200	6010	211.6	1340	5600
49.2	1370	6010	131.2	1240	6120	213.3	1410	5650
50.9	1420	6120	132.9	1290	6170	214.9	1340	5900
52.5	1470	6060	134.5	1240	6010	216.5	1400	5750
54.1	1450	6120	136.2	1140	5800	218.2	1340	5850
55.8	1290	6120	137.8	1310	5900	219.8	1630	6470
57.4	1300	6010	139.4	1280	5750	221.5	2040	7020
59.1	1360	5800	141.1	1170	5750	223.1	1860	7020
60.7	1260	5650	142.7	1190	5850	224.7	1740	6410
62.3	1210	5750	144.4	1180	6060	226.4	1810	6600
64.0	900	5560	146.0	1310	6170	228.0	1750	6670
65.6	720	5420	147.6	1330	6170	229.7	1420	6350
67.3	700	5420	149.3	1140	5850	231.3	1360	6170
68.9	700	5420	150.9	1190	5750	232.9	1630	6600
70.5	770	5510	152.6	1110	5800	234.6	2060	6870
72.2	740	5650	154.2	1030	5750	236.2	2270	7170
73.8	750	5700	155.8	1130	5800	237.9	2220	7170
75.5	990	5750	157.5	1170	5850	239.5	1920	6730
77.1	1080	6170	159.1	1140	5850	241.1	1870	6600
78.7	1070	6230	160.8	1070	5850	242.8	1900	6670
80.4	1040	6060	162.4	1010	5850	244.4	2070	6600
82.0	1000	6010	164.0	960	5800	246.1	1950	6410
83.7	1060	6120	165.7	1100	5850	247.7	1650	6670
85.3	1230	6230	167.3	1110	5900	249.3	1900	6940
86.9	1670	6350	169.3	1150	5850	251.0	2420	7020
88.6	1650	6060	170.6	1380	5950	252.6	2250	6540

Table 15. Boring B-2282A OFFSET, Suspension R1-R2 depths and P- and S_H-wave velocities

Depth (feet)	V _s (feet/sec)	V _p (feet/sec)	Depth (feet)	V _s (feet/sec)	V _p (feet/sec)
254.3	1800	6350	336.3	1960	6170
255.9	1750	6730	337.9	1600	6060
257.6	1320	6730	339.6	1390	6120
259.2	1790	6540	341.2	1540	6120
260.8	2180	6410	342.9	1410	6230
262.5	1670	6010	344.5	1440	6410
264.1	1220	5900	346.1	1690	6600
265.8	1140	6170	347.8	1760	6600
267.4	1350	6350	349.4	1600	6470
269.0	1780	6470	351.1	1720	6350
270.7	1800	6290	352.7	1530	6120
272.3	1520	6290	354.3	1520	5900
274.0	1440	6410	356.0	1390	6120
275.6	1460	6010	357.6	1750	6230
277.2	1460	6600	359.3	1690	6010
278.9	1410	5600	360.9	1650	6170
280.5	1280	5900	362.5	1380	6290
282.2	1520	5700	364.2	1490	5800
283.8	1240	5800	365.8	1280	5750
285.4	990	5850	367.5	1270	5850
287.1	1000	5850	369.1	1680	6060
288.7	1140	5700	370.7	1930	6060
290.4	1250	6010	372.4	1680	5950
292.0	1370	5950	374.0	1280	5850
293.6	1350	6010	375.7	1150	5650
295.3	1370	5900	377.3	1140	5600
296.9	1310	5900	378.9	1050	5510
298.6	1290	5900	380.6	1050	5560
300.2	1310	5850	382.2	1040	5510
301.8	1320	5850	383.9	1050	5510
303.5	1310	5950	385.5	1090	5510
305.1	1440	6540	387.1	1090	5510
306.8	1750	6290	388.8	1090	5510
308.4	1590	6230	390.4	1100	5510
310.0	1300	5900	392.1	1110	5560
311.7	1290	5950	393.7	1120	5600
313.3	1380	5950	395.3	1190	5750
315.0	1300	5750			
316.6	1210	5750			
318.2	1170	5700			
319.9	1190	5700			
321.5	1190	5750			
323.2	1180	5800			
324.8	1220	5950			
326.4	1270	6010			
328.1	1370	6010			
329.7	1460	6290			
331.4	1750	6540			
333.0	1940	6470			
334.7	2020	6350			

Table 15, continued. Boring B-2282A OFFSET, Suspension R1-R2 depths and P- and S_H-wave velocities

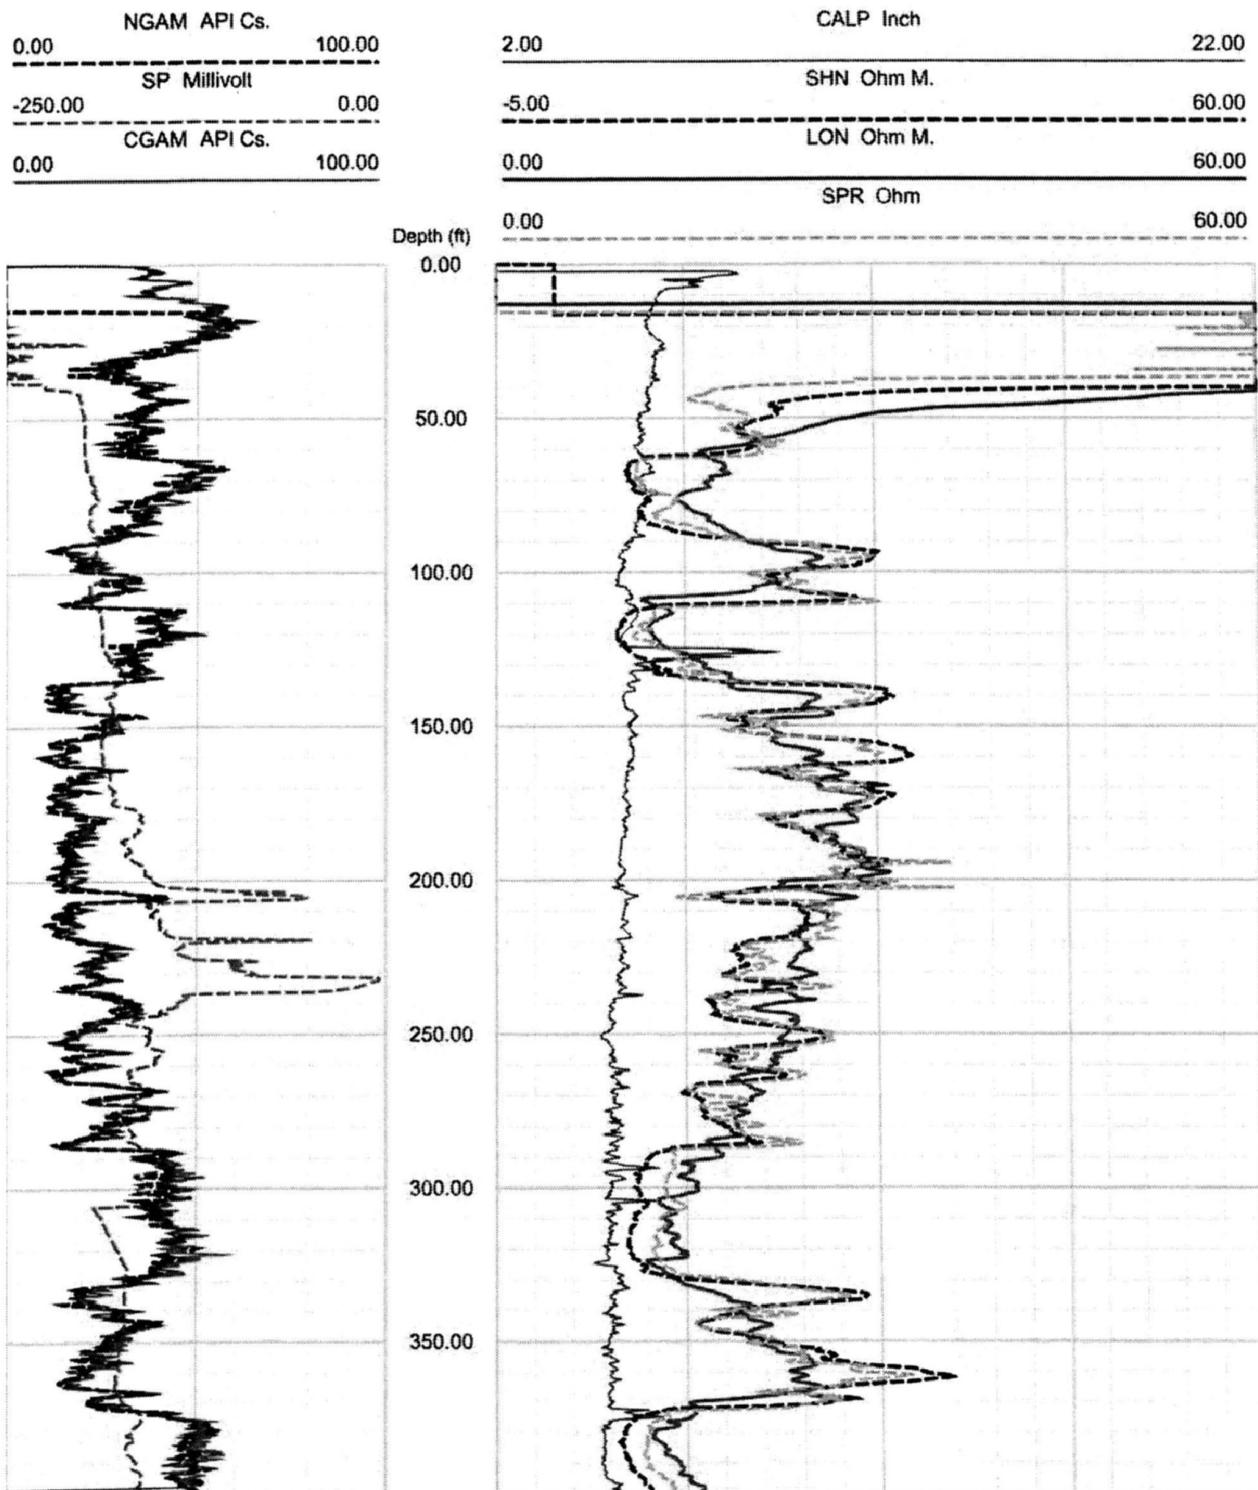


Figure 30. Boring B-2282A OFFSET, Caliper, Natural gamma, Resistivity and SP logs

Deviated borehole in orthographic projection, viewed from N170

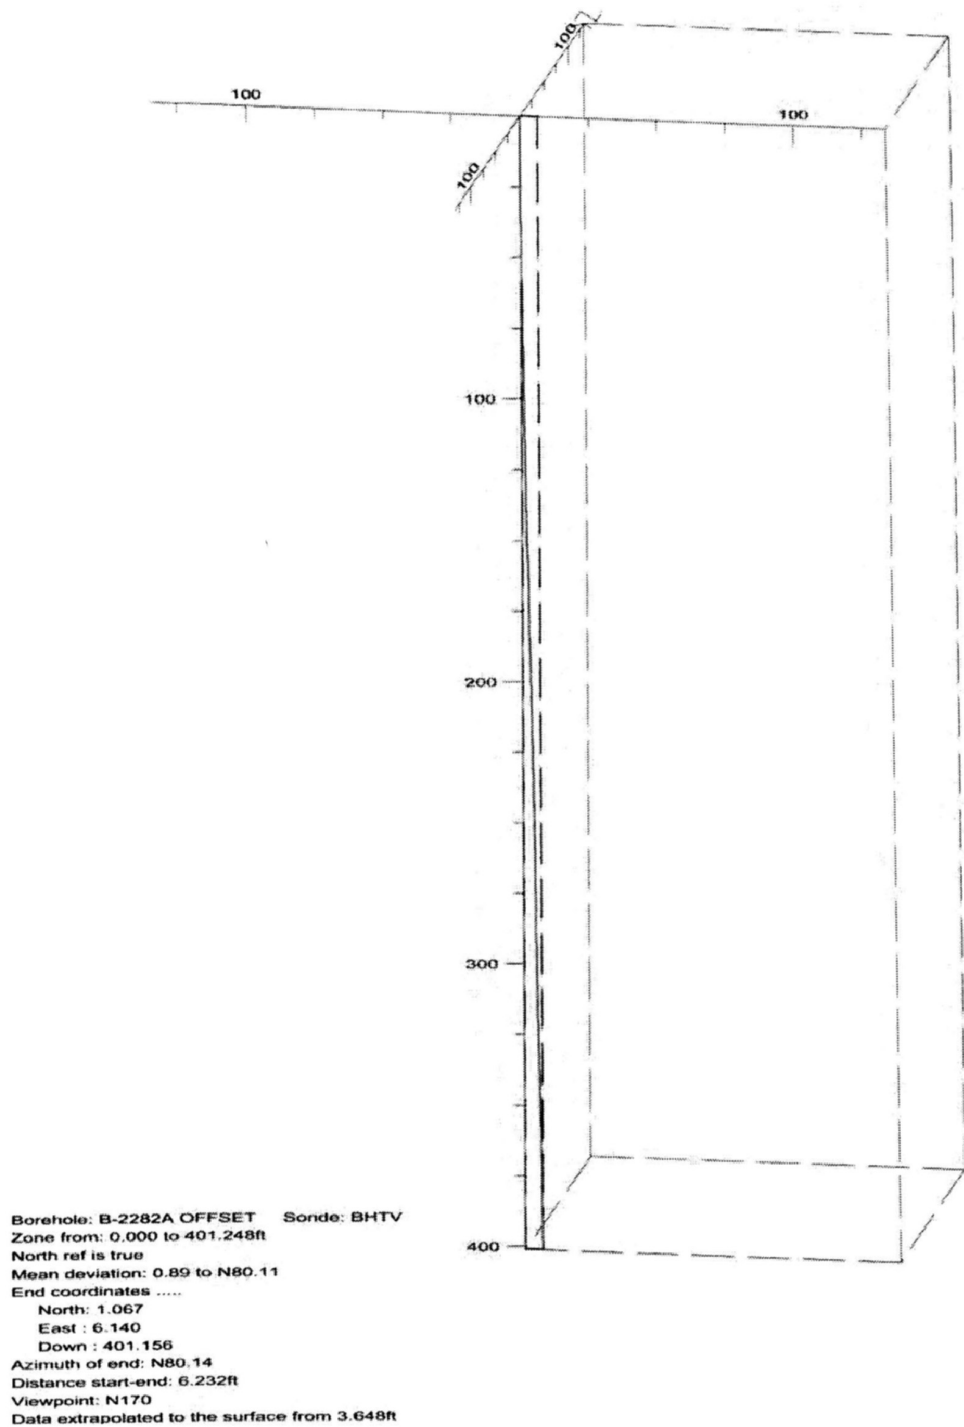


Figure 31. Boring B-2282A OFFSET, Deviation Projection (dimensions in feet)

VICTORIA COUNTY COL BORING B-2301 **Receiver to Receiver V_s and V_p Analysis**

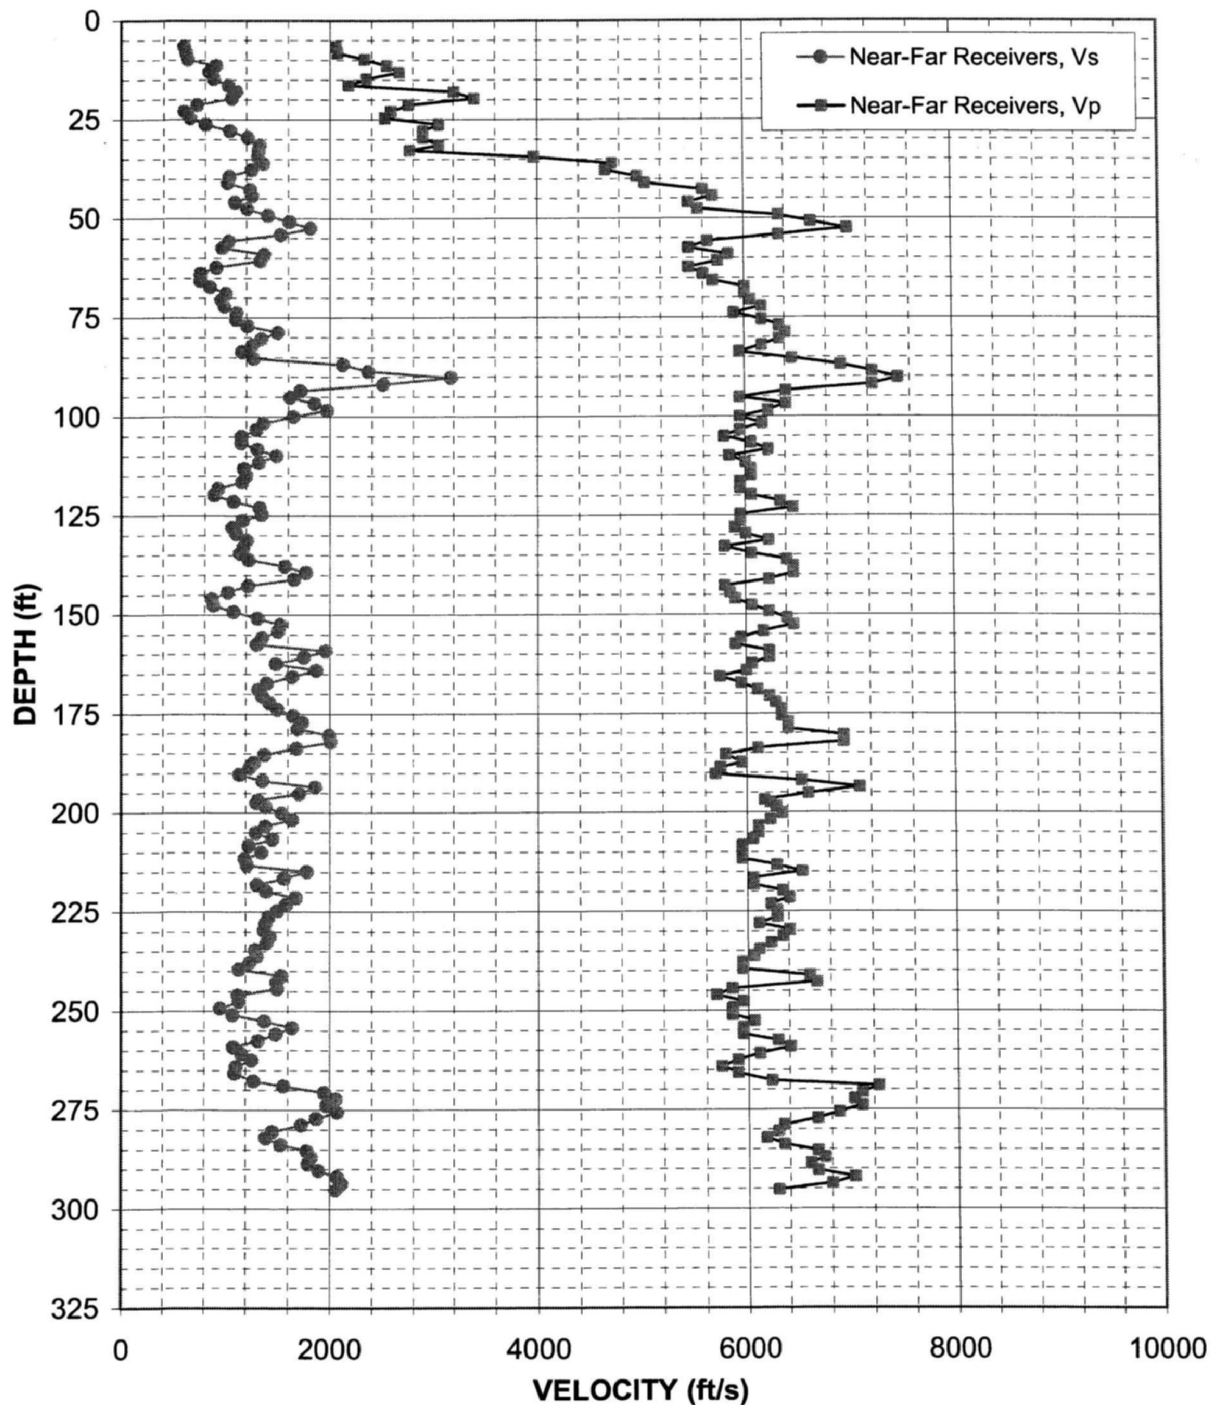


Figure 32: Boring B-2301, Suspension R1-R2 P- and S_H -wave velocities

Depth (feet)	V _s (feet/sec)	V _p (feet/sec)	Depth (feet)	V _s (feet/sec)	V _p (feet/sec)	Depth (feet)	V _s (feet/sec)	V _p (feet/sec)
6.6	590	2060	88.6	2360	7250	170.6	1360	6230
8.2	610	2070	90.2	3170	7490	172.2	1420	6290
9.8	630	2330	91.9	2510	7250	173.9	1500	6350
11.5	910	2540	93.5	1720	6410	175.5	1650	6350
13.1	840	2670	95.1	1620	5950	177.2	1740	6410
14.8	880	2350	96.8	1850	6410	178.8	1690	6410
16.4	1030	2180	98.4	1970	6230	180.5	2000	6940
18.0	1100	3210	100.1	1650	5950	182.1	2010	6940
19.7	1060	3400	101.7	1370	6170	183.7	1680	6120
21.3	720	2750	103.4	1300	5950	185.4	1380	5800
23.0	600	2580	105.0	1150	5800	187.3	1280	5950
24.6	650	2530	106.6	1150	6060	188.7	1240	5750
26.3	800	3060	108.3	1310	6230	190.3	1140	5700
27.9	1040	2900	109.9	1490	5850	191.9	1360	6540
29.5	1210	2900	111.6	1320	6010	193.6	1860	7090
31.5	1330	3060	113.2	1180	6060	195.2	1710	6600
32.8	1320	2770	114.8	1200	6060	196.9	1320	6170
34.5	1310	3970	116.5	1160	5950	197.5	1300	6230
36.1	1360	4730	118.1	930	5950	198.5	1390	6290
37.7	1250	4660	119.8	890	6060	200.1	1540	6350
39.4	1040	4980	121.4	1080	6350	201.8	1640	6230
41.0	1020	5050	123.0	1330	6470	203.4	1390	6120
42.7	1230	5600	124.7	1350	5950	205.1	1300	6120
44.3	1250	5700	126.3	1170	5950	206.7	1460	6060
45.9	1090	5460	128.0	1060	5900	208.3	1230	5950
47.6	1210	5560	129.6	1110	6010	210.0	1350	5950
49.2	1410	6350	131.2	1210	6230	211.6	1190	5950
50.9	1610	6670	132.9	1170	5800	213.3	1210	6290
52.5	1810	7020	134.5	1140	6060	214.9	1780	6540
54.1	1530	6350	136.2	1230	6410	216.5	1560	6060
55.8	1030	5650	137.8	1570	6470	218.2	1310	6060
57.4	970	5460	139.4	1770	6470	219.8	1390	6350
59.1	1370	5850	141.1	1660	6230	221.5	1680	6410
60.7	1330	5750	142.7	1220	5800	223.1	1590	6230
62.3	910	5460	144.4	1030	5850	224.7	1500	6290
64.0	750	5600	146.0	870	5900	226.4	1420	6290
65.6	750	5700	147.6	890	6060	228.0	1390	6120
67.3	850	6010	149.3	1080	6230	229.7	1380	6410
68.9	1000	6010	150.9	1310	6410	231.3	1430	6350
70.5	960	6060	152.6	1530	6470	232.9	1400	6230
72.2	990	6170	154.2	1510	6170	234.6	1290	6120
73.8	1100	5900	155.8	1360	5950	236.2	1310	6060
75.5	1100	6170	157.5	1300	5900	237.9	1240	5950
77.1	1210	6350	159.1	1960	6230	239.5	1140	5950
78.7	1500	6410	160.8	1750	6230	241.1	1540	6600
80.4	1340	6350	162.4	1490	6060	242.8	1490	6670
82.0	1260	6170	164.0	1870	6010	244.4	1500	5850
83.7	1160	5950	165.7	1640	5750	246.1	1130	5700
85.3	1270	6470	167.3	1400	5950	247.7	1140	5950
86.9	2120	6940	169.0	1320	6120	249.3	960	5850

Table 16. Boring B-2301, Suspension R1-R2 depths and P- and S_H-wave velocities

Depth (feet)	V _s (feet/sec)	V _p (feet/sec)
251.0	1080	5850
252.6	1380	6060
254.3	1640	5950
255.9	1490	5950
257.6	1320	6290
259.2	1080	6410
260.8	1160	6120
262.5	1260	5900
264.1	1110	5750
265.8	1100	5900
267.7	1280	6230
269.0	1560	7250
270.7	1950	7090
272.3	2060	7020
274.0	1970	7090
275.6	2070	6870
277.2	1870	6670
278.9	1730	6350
280.5	1460	6290
282.2	1390	6170
283.8	1540	6350
285.4	1780	6670
287.1	1820	6730
288.7	1790	6600
290.4	1890	6670
292.0	2070	7020
293.6	2110	6800
295.3	2060	6290

Table 16, continued. Boring B-2301, Suspension R1-R2 depths and P- and S_H-wave velocities

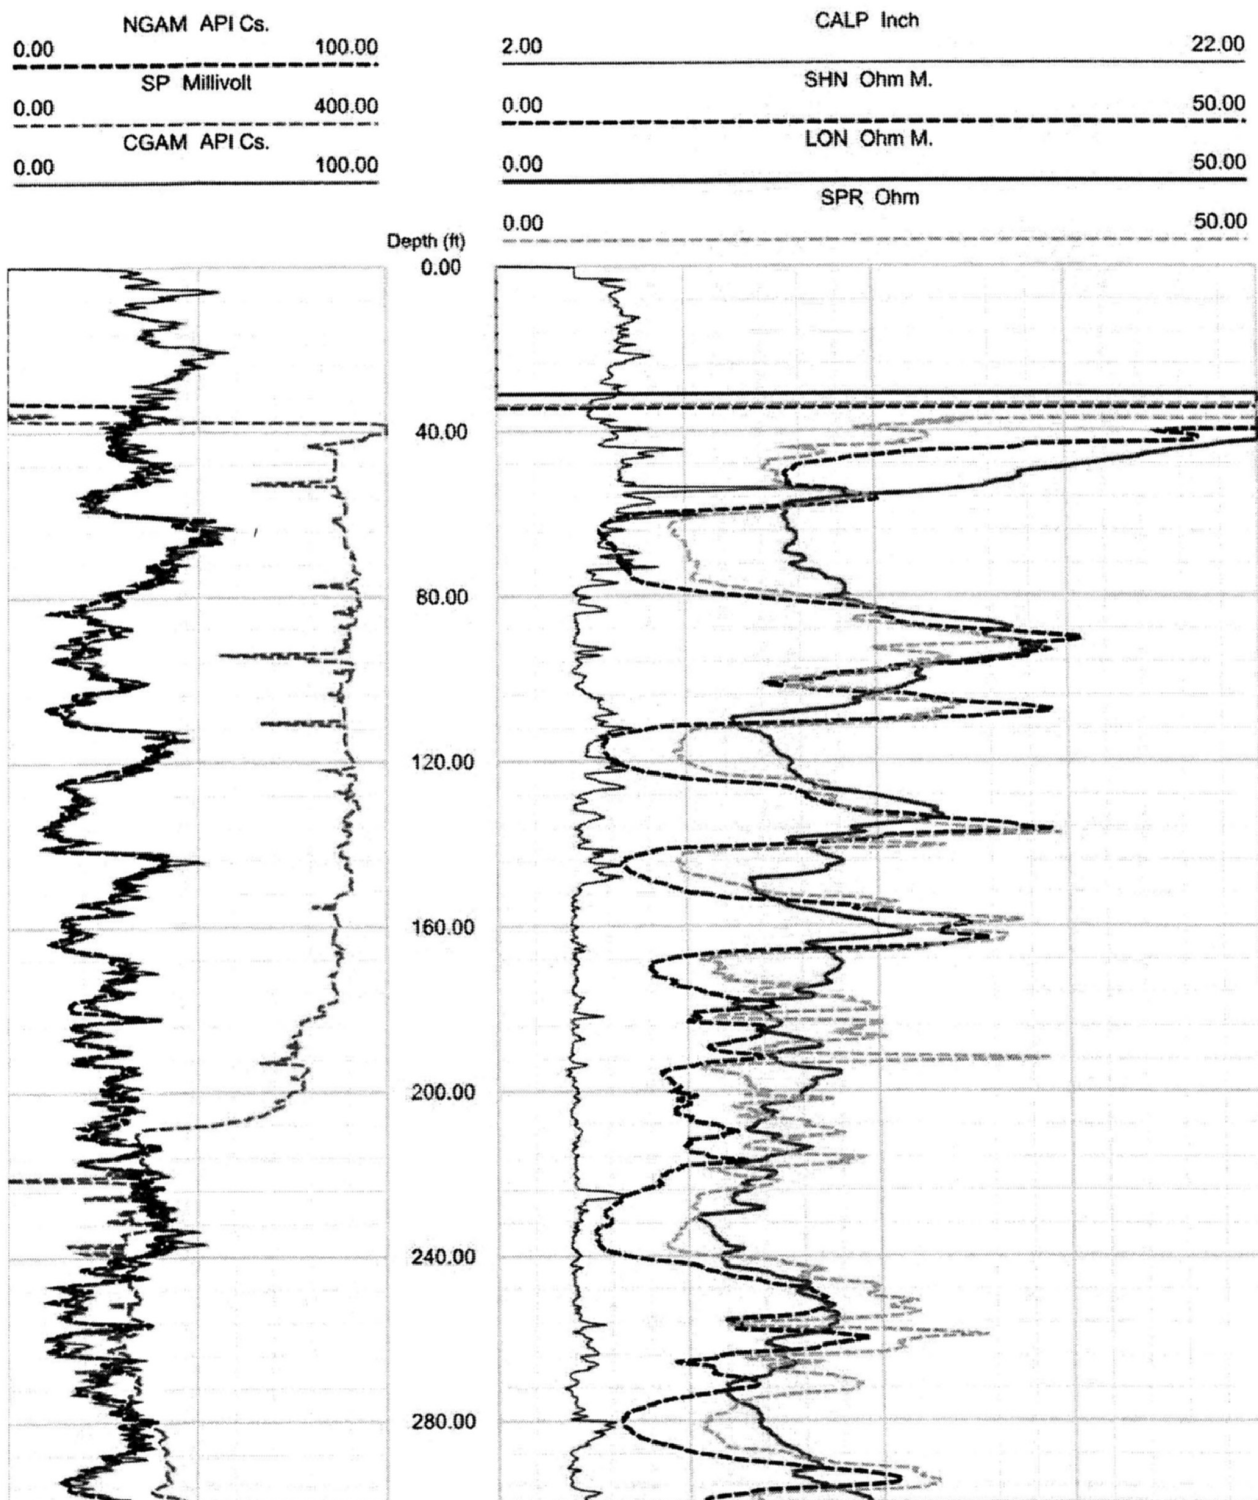


Figure 33. Boring B-2301, Caliper, Natural gamma, Resistivity and SP logs

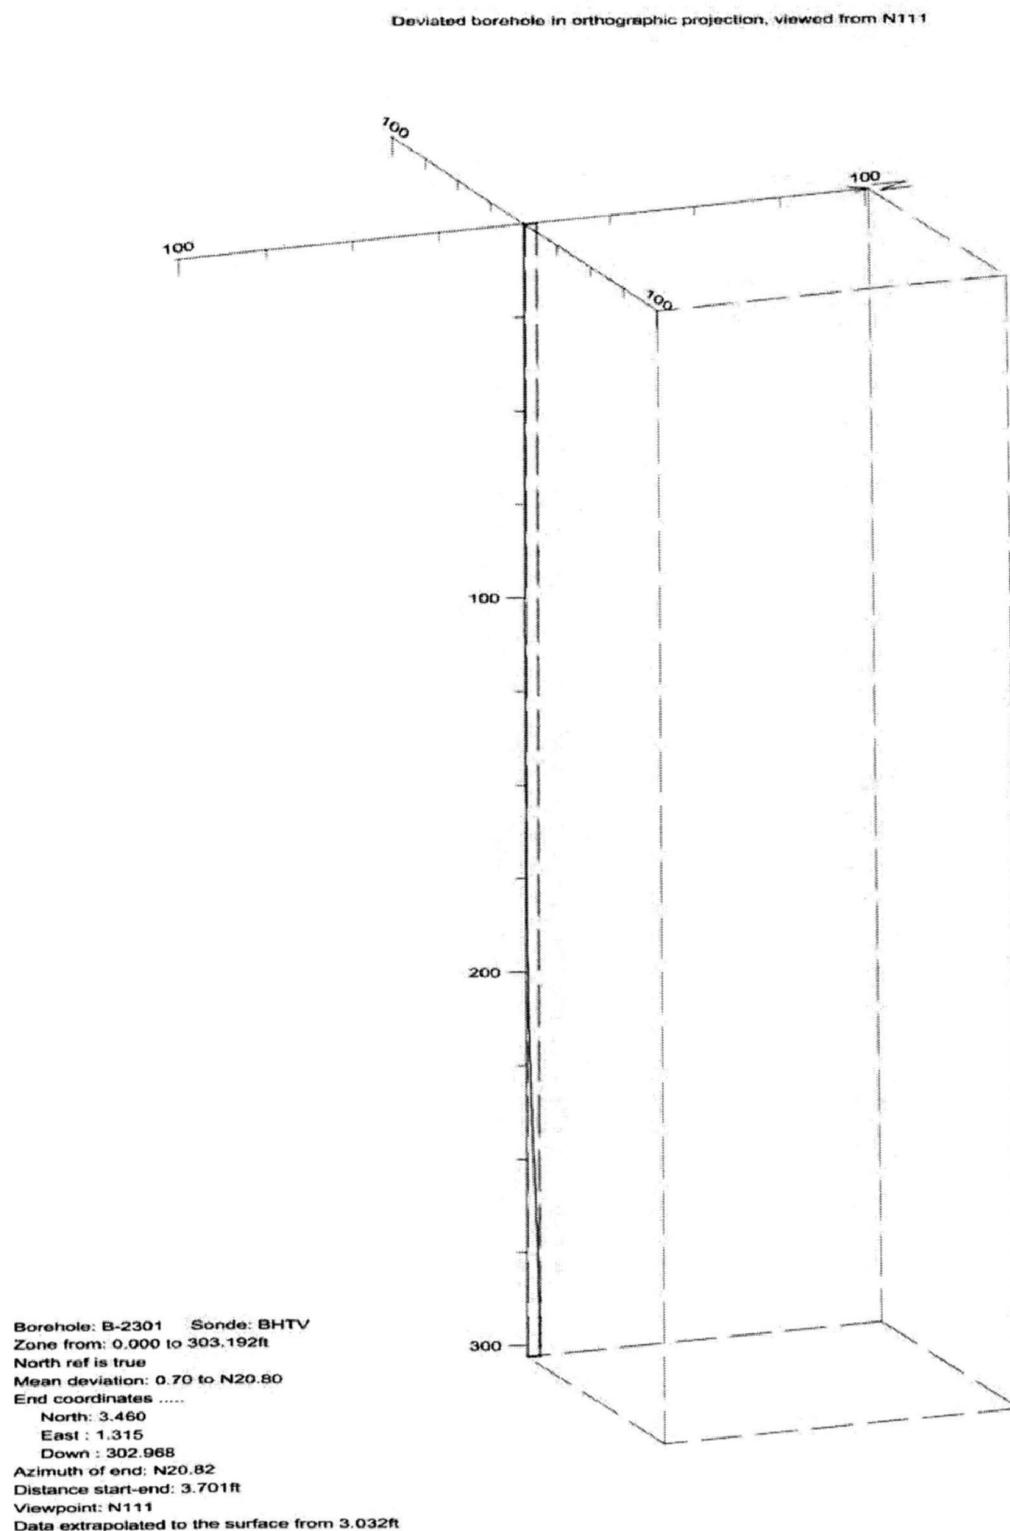


Figure 34. Boring B-2301, Deviation Projection (dimensions in feet)

VICTORIA COUNTY COL BORING B-2302 **Receiver to Receiver V_s and V_p Analysis**

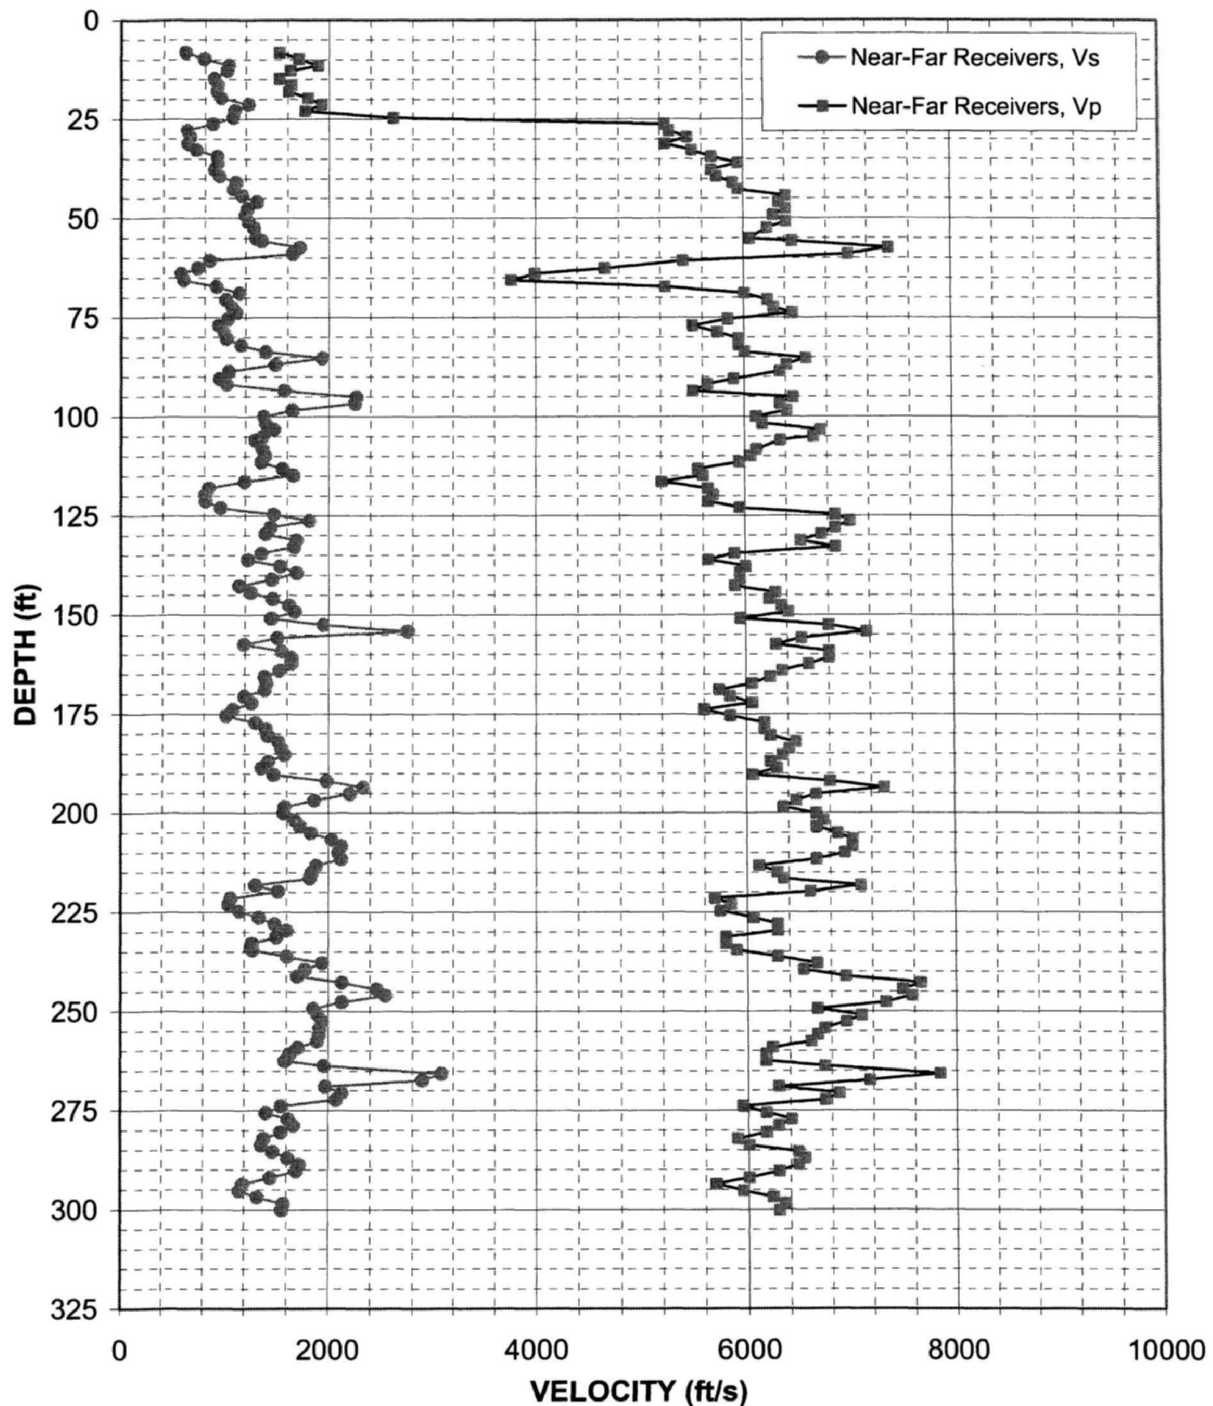


Figure 35: Boring B-2302, Suspension R1-R2 P- and S_H -wave velocities

Depth (feet)	V _s (feet/sec)	V _p (feet/sec)	Depth (feet)	V _s (feet/sec)	V _p (feet/sec)	Depth (feet)	V _s (feet/sec)	V _p (feet/sec)
8.2	610	1520	90.6	950	5900	172.2	1260	6060
9.8	790	1710	91.9	1020	5650	173.9	1090	5600
11.5	1030	1890	93.5	1570	5510	175.5	1020	5850
12.8	1020	1630	95.1	2270	6470	177.2	1300	6170
14.8	890	1520	96.8	2250	6350	178.8	1400	6170
16.4	930	1630	98.4	1650	6410	180.5	1420	6230
18.0	920	1610	100.1	1380	6120	182.1	1520	6470
19.7	960	1790	101.7	1390	6170	183.7	1550	6410
21.3	1220	1930	103.4	1470	6730	185.4	1580	6350
23.0	1090	1770	105.0	1370	6670	187.0	1420	6230
24.6	1080	2610	106.0	1300	6350	188.7	1360	6290
26.3	880	5250	108.3	1370	6120	190.3	1470	6060
27.9	630	5290	109.9	1390	6060	191.9	1980	6800
29.5	660	5460	111.6	1360	5950	193.6	2330	7330
31.2	630	5250	113.2	1560	5560	195.2	2210	6670
32.8	720	5510	114.8	1660	5600	196.9	1860	6470
34.5	920	5700	116.5	1190	5210	198.5	1580	6350
36.1	920	5950	118.1	840	5650	200.1	1570	6670
37.7	890	5700	119.8	810	5700	201.8	1680	6730
39.4	940	5750	121.4	810	5650	203.4	1730	6670
41.0	1110	5900	123.0	960	5950	205.1	1830	6870
42.7	1080	5950	124.7	1470	6870	206.7	2030	7020
44.3	1160	6410	126.3	1810	7020	208.3	2120	7020
45.9	1310	6350	128.0	1440	6870	210.0	2100	6940
47.6	1220	6410	129.6	1390	6730	211.6	2120	6670
49.2	1190	6290	131.2	1690	6540	213.3	1880	6120
50.9	1230	6410	132.9	1670	6870	214.9	1840	6290
52.5	1280	6230	134.5	1360	5900	216.5	1820	6350
55.1	1300	6060	136.2	1230	5650	218.2	1300	7090
55.8	1360	6470	137.8	1540	6010	219.8	1520	6600
57.4	1720	7410	139.4	1690	5950	221.5	1070	5700
59.1	1650	7020	141.1	1460	5950	223.1	1050	5850
60.7	850	5420	142.7	1140	5900	224.7	1150	5750
62.7	730	4660	144.4	1250	6290	226.4	1340	6060
64.0	570	3990	146.0	1460	6230	228.0	1490	6290
65.6	590	3770	147.6	1620	6350	229.7	1600	6290
67.3	920	5250	149.3	1680	6410	231.3	1500	5800
68.9	1140	6010	150.9	1450	5950	232.9	1270	5800
70.5	1010	6230	152.6	1950	6800	234.6	1280	5900
72.5	1070	6290	154.2	2750	7170	236.2	1610	6290
73.8	1110	6470	155.8	1510	6540	237.9	1940	6670
75.5	1030	5850	157.5	1190	6290	239.5	1780	6540
77.1	940	5510	159.1	1550	6800	241.1	1710	6940
78.7	990	5750	160.8	1640	6800	242.8	2130	7660
80.4	1020	5950	162.4	1640	6600	244.4	2460	7490
82.0	1160	5950	164.0	1530	6350	246.1	2540	7580
83.7	1390	6010	165.7	1390	6230	247.7	2130	7330
85.3	1940	6600	167.3	1410	6060	249.3	1860	6670
86.9	1490	6410	169.0	1390	5750	251.0	1900	7090
88.6	1040	6350	170.6	1190	5850	252.6	1940	6940

Table 17. Boring B-2302, Suspension R1-R2 depths and P- and S_H-wave velocities

Depth (feet)	V _s (feet/sec)	V _p (feet/sec)
254.3	1920	6730
255.9	1910	6670
257.6	1890	6600
259.2	1710	6230
260.8	1630	6170
262.5	1590	6170
263.8	1960	6730
265.8	3090	7840
267.4	2900	7170
269.0	1970	6290
270.7	2130	6870
272.3	2080	6730
274.0	1550	5950
275.6	1410	6170
277.2	1620	6410
278.9	1670	6290
280.5	1550	6170
282.2	1390	5900
283.8	1360	6010
285.4	1470	6470
287.1	1610	6540
288.7	1720	6470
290.4	1700	6290
292.0	1450	6010
293.6	1190	5700
295.3	1150	5950
296.9	1330	6230
298.6	1570	6350
300.2	1560	6290

Table 17, continued. Boring B-2302, Suspension R1-R2 depths and P- and S_H-wave velocities

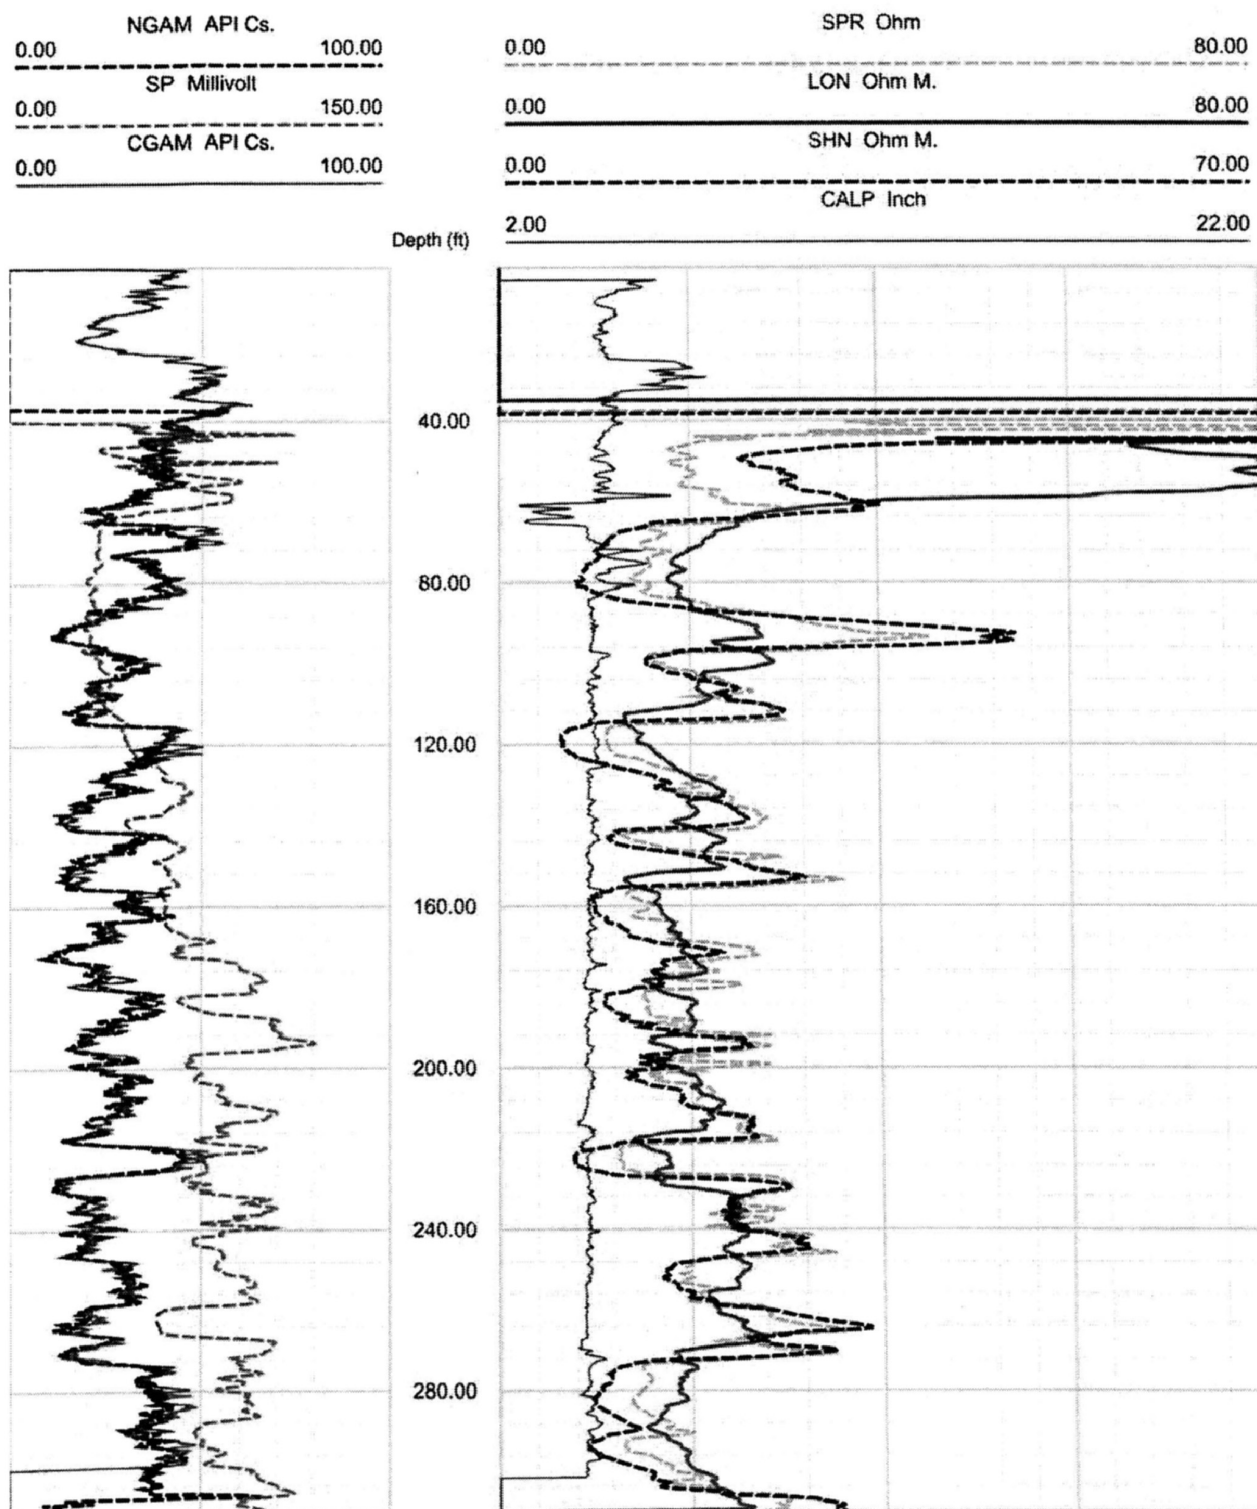


Figure 36. Boring B-2302, Caliper, Natural gamma, Resistivity and SP logs

Deviated borehole in orthographic projection, viewed from N320

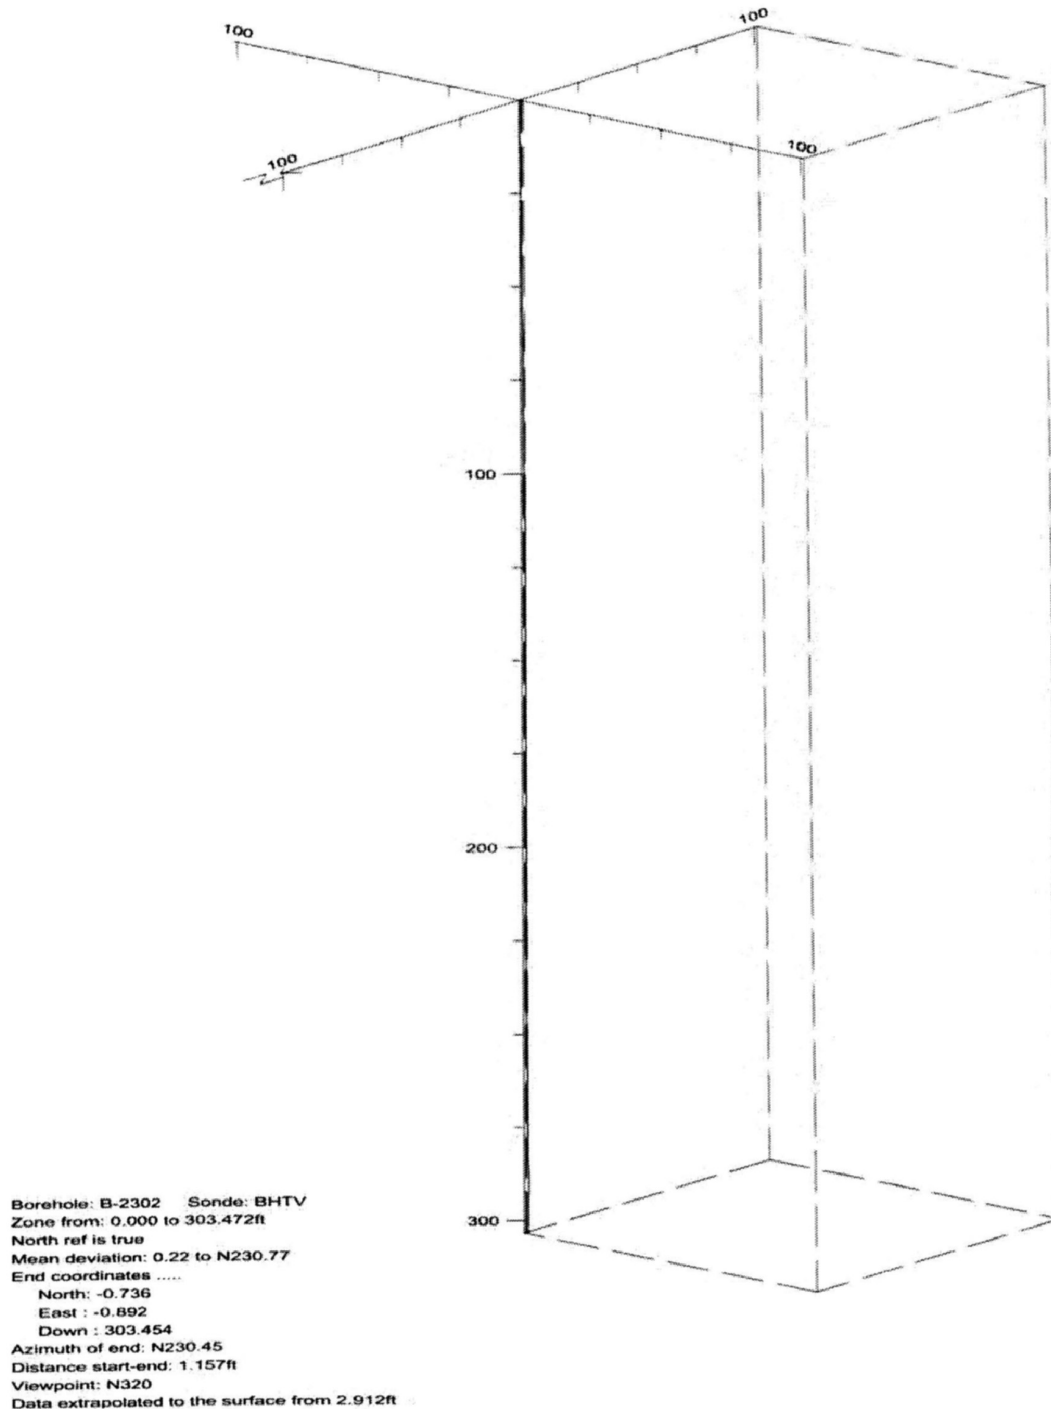


Figure 37. Boring B-2302, Deviation Projection (dimensions in feet)

VICTORIA COUNTY COL BORING B-2303 **Receiver to Receiver V_s and V_p Analysis**

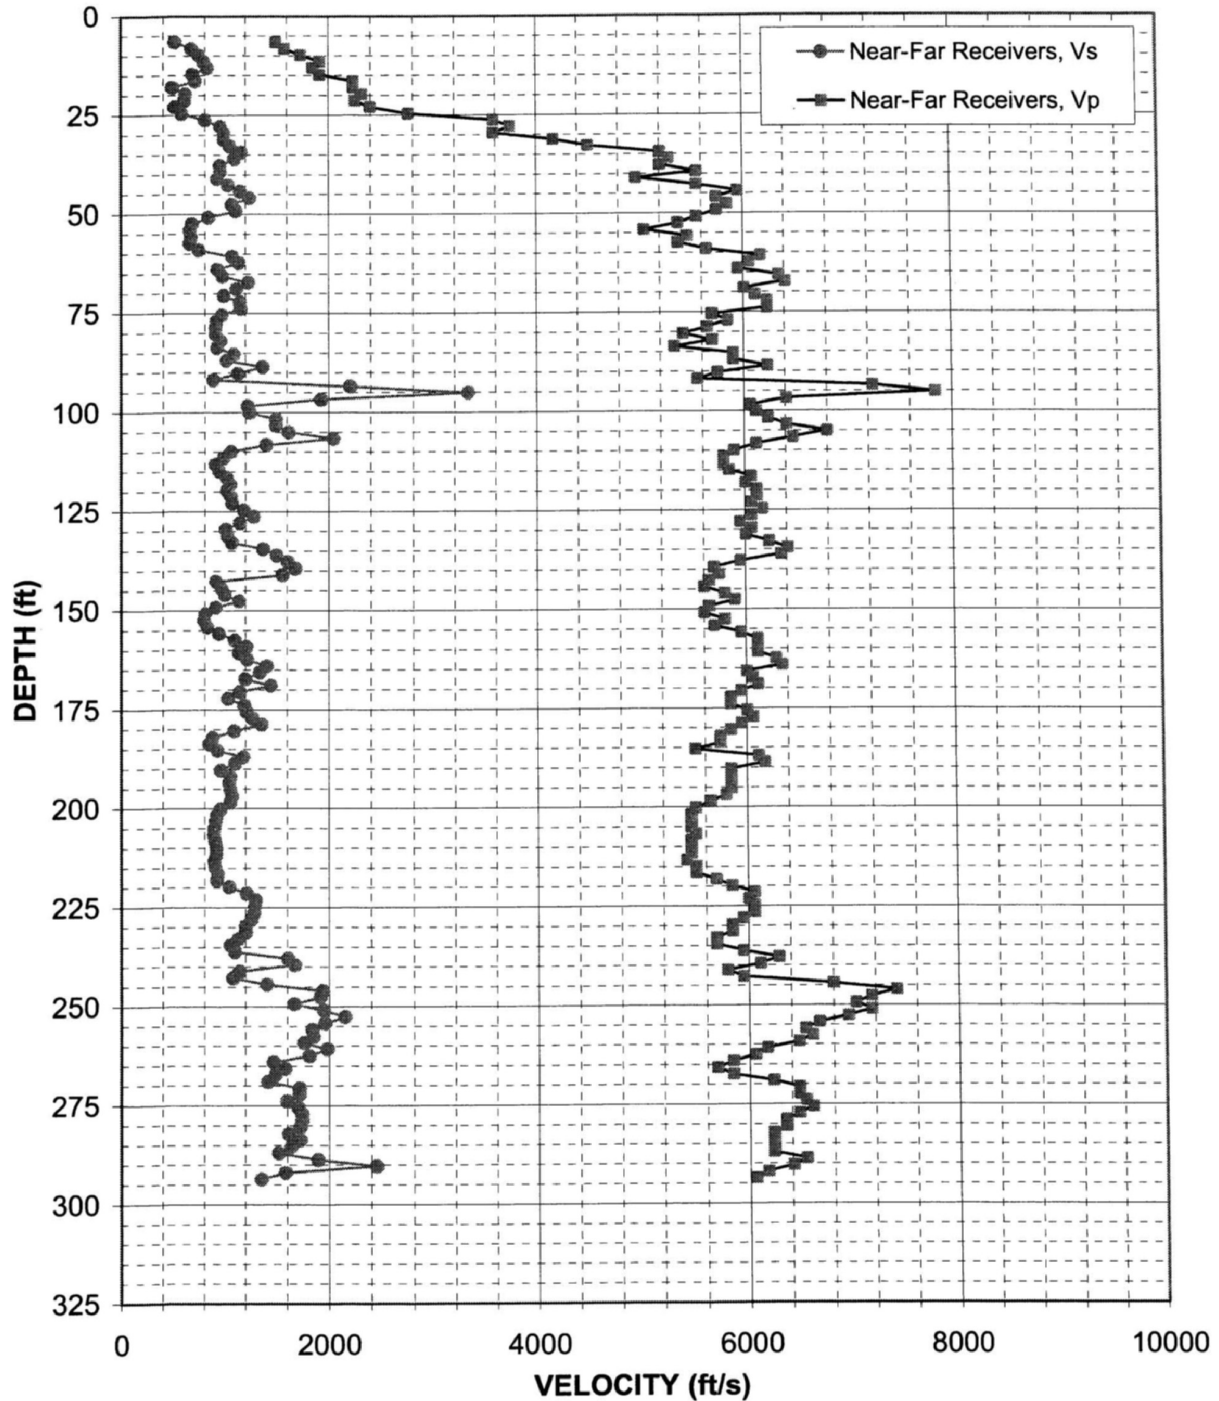


Figure 38: Boring B-2303, Suspension R1-R2 P- and S_H -wave velocities

Depth (feet)	V _s (feet/sec)	V _p (feet/sec)	Depth (feet)	V _s (feet/sec)	V _p (feet/sec)	Depth (feet)	V _s (feet/sec)	V _p (feet/sec)
6.6	510	1490	88.6	1370	6230	170.6	1150	5950
8.2	670	1580	90.2	1130	5750	172.2	1030	5850
9.8	740	1740	91.9	880	5560	173.9	1190	5850
11.5	780	1920	93.5	2210	7250	175.5	1210	6010
13.1	820	1850	95.1	3330	7840	177.2	1260	6060
14.8	680	1920	96.8	1930	6410	178.8	1360	5950
16.4	700	2240	98.4	1220	6060	180.5	1090	5850
18.0	480	2240	100.1	1240	6120	182.1	880	5750
19.7	610	2310	101.7	1490	6230	183.7	840	5750
21.3	600	2250	103.4	1490	6410	185.4	930	5510
23.0	510	2400	105.0	1620	6800	187.0	1180	6120
24.6	570	2750	106.6	2040	6470	188.7	1100	6170
26.3	800	3580	108.3	1400	6120	190.3	960	5850
27.9	950	3750	109.9	1060	5900	191.9	1050	5850
29.5	990	3580	111.6	990	5800	193.6	1040	5850
31.2	990	4170	113.2	900	5800	195.2	1050	5850
32.8	1040	4500	114.8	940	5850	196.9	1070	5800
34.5	1160	5210	116.5	1020	6060	198.5	1050	5650
36.1	1090	5290	118.1	1050	6010	200.1	960	5510
37.7	950	5210	119.8	1020	6120	201.8	920	5460
39.4	950	5560	121.4	1060	6120	203.4	910	5460
41.0	920	4980	123.0	1070	6060	205.1	890	5460
42.7	1030	5560	124.7	1180	6170	206.7	890	5510
44.3	1150	5950	126.3	1280	6060	208.3	900	5460
45.9	1240	5750	128.0	1150	5950	210.0	920	5460
47.6	1060	5850	129.6	1010	6060	211.6	920	5460
49.2	1100	5750	131.2	1020	6010	213.3	900	5420
50.9	840	5560	132.9	1070	6230	214.9	910	5510
52.5	670	5380	134.5	1370	6410	216.5	930	5510
54.1	650	5050	136.2	1500	6350	218.2	920	5700
55.8	660	5460	137.8	1610	5950	219.8	1040	5850
57.4	650	5380	139.4	1680	5700	221.5	1210	6060
59.1	740	5650	141.1	1560	5750	223.1	1300	6010
60.7	1070	6170	142.7	910	5650	224.7	1290	6060
62.3	1140	6060	144.4	970	5600	226.4	1280	6060
64.0	920	5950	146.0	1000	5800	228.0	1260	5950
65.6	970	6350	147.6	1140	5900	229.7	1200	5850
67.3	1230	6410	149.3	910	5650	231.3	1200	5850
68.9	1110	6010	150.9	800	5600	232.9	1130	5700
70.5	990	6120	152.6	790	5800	234.6	1050	5700
72.2	1150	6230	154.2	830	5700	236.2	1100	5950
73.8	1150	6230	155.8	940	5950	237.9	1610	6290
75.5	970	5700	157.5	1100	6120	239.5	1680	6120
77.1	910	5850	159.1	1210	6120	241.1	1150	5800
78.7	910	5650	160.8	1140	6120	242.8	1080	5950
80.4	910	5420	162.4	1220	6290	244.4	1410	6800
82.0	960	5700	164.0	1410	6350	246.1	1940	7410
83.7	920	5330	165.7	1340	6010	247.7	1920	7170
85.3	1090	5900	167.3	1200	6060	249.3	1670	7020
86.9	1020	5900	169.0	1440	6120	251.0	1950	7170

Table 18. Boring B-2303, Suspension R1-R2 depths and P- and S_H-wave velocities

Depth (feet)	V _s (feet/sec)	V _p (feet/sec)
252.6	2150	6940
254.3	1960	6670
255.9	1840	6540
257.6	1850	6600
259.2	1760	6470
260.8	1980	6170
262.5	1810	6060
264.1	1470	5850
265.8	1580	5700
267.4	1490	5850
269.0	1420	6230
270.7	1720	6470
272.3	1720	6470
274.0	1600	6540
275.6	1710	6600
277.2	1750	6470
278.9	1750	6350
280.5	1730	6350
282.2	1620	6230
283.8	1730	6230
285.4	1640	6230
287.1	1520	6230
288.7	1890	6540
290.4	2450	6410
292.0	1590	6170
293.6	1360	6060

Table 18, continued. Boring B-2303, Suspension R1-R2 depths and P- and S_H-wave velocities

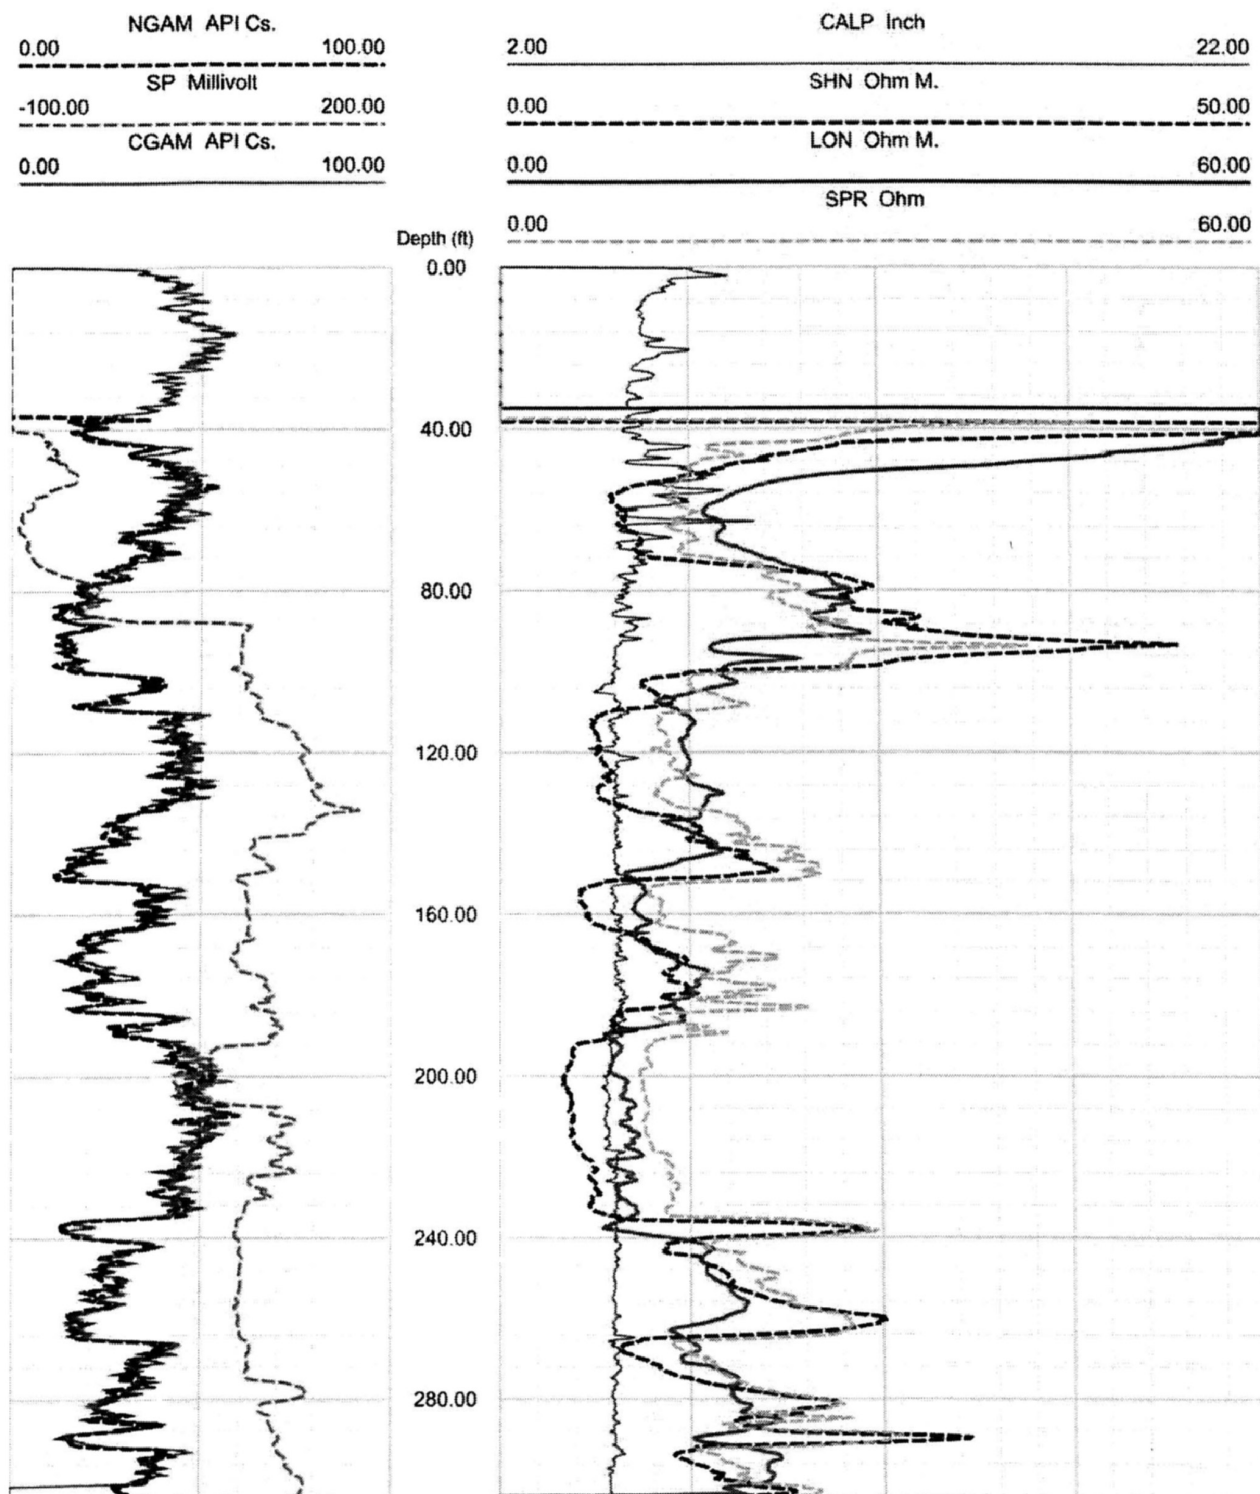


Figure 39. Boring B-2303, Caliper, Natural gamma, Resistivity and SP logs