

Attachment 13

Westinghouse Electric Company WNA-DS-01667-WBT-NP, Revision 4, "Post Accident Monitoring System – System Design Specification," Dated February 2011



Westinghouse Non-Proprietary Class 3

Nuclear Automation Watts Bar Unit 2 NSSS Completion Program I&C Projects

Post Accident Monitoring System – System Design Specification

**WNA-DS-01667-WBT-NP,
Rev. 4**

February 2011

APPROVALS

Function	Name and Signature
Author	Digish R. Shah* Engineer, CE Fleet Safety System Support & Upgrades
Reviewer	Allen C. Denyer* Principal Engineer, CE Fleet Safety System Support & Upgrades
	Stephanie L. Smith* Project Manager, Common Q PAMS
Approver	Mesut B. Uzman* Product Manager, New Plant Safety Support Systems

*Electronically approved records are authenticated in the electronic document management system.

WESTINGHOUSE NON-PROPRIETARY CLASS 3

LIST OF CONTRIBUTORS

Revision	Name and Title
1, 2, 4	Jenna L. Tyger Editorial Specialist, Technical Communications
3	Stephanie L. Smith Editorial Specialist, New Plant Safety Support Systems

REVISION HISTORY

RECORD OF CHANGES

Revision	Author	Description	Completed
1	Digish R. Shah	Added brackets to WNA-DS-01667-WBT, Rev. 1, to indicate proprietary information.	July 2010
2	Digish R. Shah	Added brackets to WNA-DS-01667-WBT, Rev. 2, to indicate proprietary information.	November 2010
3	Digish R. Shah	<ul style="list-style-type: none"> Updated reference revisions: Reference 1, 4, 10 Updated Acronyms Updated Figures: Figure 2.1-1, 4.4-1 Added: SDS4.4.2.3-2 Revised: SDS4.4.1.1-2, SDS4.4.1.2-3, R4.4.1.3-1, SDS4.4.2.1-1, R4.4.2.3-1, R4.4.3-1, R4.4.3-21 Updated traceability: SDS3.3-1, SDS4.3.1-1, SDS4.3.1-2, SDS4.3.1-3, R4.4.1.1-2, SDS4.4.1.2-3, SDS4.4.1.2-6, SDS4.4.2.1-3, R4.4.2.1-1, R4.4.2.3-2, R4.4.3-16, SDS5.1-1, SDS5.2-2, SDS5.2-3 Removed typographical errors: Section 4.4, SDS5.2-1 Reworded FE switch and SLE switch to FE keyswitch and SLE keyswitch throughout the document for consistency 	November 2010
4	Digish R. Shah	<ul style="list-style-type: none"> Updated reference revisions: Reference 1 Updated Figures 2.1-1 and 4.2-2 Revised: SDS4.2.1.2-2, SDS4.2.1.3-3, SDS4.3.1-1, SDS4.3.1-3, SDS4.4.2.1-3 Added R4.4.2.1-4 	See EDMS

DOCUMENT TRACEABILITY & COMPLIANCE

Created to Support the Following Document(s)	Document Number	Revision
Watts Bar Unit 2 Post Accident Monitoring System - System Requirements Specification	WNA-DS-01617-WBT-P	4

OPEN ITEMS

Item	Description	Status
None		

TABLE OF CONTENTS

Section	Title	Page
	LIST OF CONTRIBUTORS	i
	REVISION HISTORY	ii
	TABLE OF CONTENTS.....	iv
	LIST OF TABLES.....	vi
	LIST OF FIGURES	vi
	ACRONYMS AND TRADEMARKS.....	vii
	GLOSSARY OF TERMS	ix
	REFERENCES	x
	REQUIREMENTS.....	xi
SECTION 1	INTRODUCTION	1-1
1.1	PURPOSE.....	1-1
1.2	SCOPE	1-1
1.3	FORMAT OF THE DOCUMENT	1-1
1.3.1	Requirement Compliance.....	1-1
1.3.2	Requirements Specification Format.....	1-1
1.3.3	Design Statement Format.....	1-2
SECTION 2	PAMS ARCHITECTURE DESCRIPTION	2-1
2.1	PAMS OVERVIEW	2-1
2.2	PAMS ARCHITECTURE	2-1
SECTION 3	PAMS FUNCTIONALITY	3-1
3.1	PAMS FUNCTIONALITY OVERVIEW	3-1
3.2	MTP FUNCTIONALITY	3-1
3.3	OM FUNCTIONALITY	3-1
SECTION 4	PAMS HARDWARE CONFIGURATION	4-1
4.1	PAMS HARDWARE CONFIGURATION OVERVIEW	4-1
4.2	PAMS CABINET	4-3
4.2.1	Cabinet Layout.....	4-3
4.2.1.1	Common Q Power Supply Layout.....	4-5
4.2.1.2	RF616 Primary Subrack Layout	4-5
4.2.1.3	MTP Layout.....	4-9
4.2.1.4	RF620 Extension Subrack Layout	4-10
4.2.2	Cabinet Numbering.....	4-11
4.3	MTP/OM CONFIGURATION.....	4-11
4.3.1	Keylock Switches	4-11

TABLE OF CONTENTS (Cont'd)

Section	Title	Page
4.4	HARDWARE DESCRIPTION	4-13
4.4.1	Common Q Qualified Hardware	4-13
4.4.1.1	Cabinet.....	4-13
4.4.1.2	AC160 Modules.....	4-13
4.4.1.3	I/O Termination Units.....	4-29
4.4.1.4	FPD System	4-30
4.4.1.5	Power Supply System	4-30
4.4.2	PAMS Standard Hardware Subassemblies	4-32
4.4.2.1	Interposing Relay Panel (IRP)	4-32
4.4.2.2	Cabinet Temperature Sensors	4-34
4.4.2.3	Field Terminal Blocks	4-34
4.4.2.4	Input Power Distribution Breaker Panel (AC).....	4-34
4.4.2.5	DC Distribution Breaker Assembly	4-35
4.4.2.6	Auxiliary Power Supply.....	4-35
4.4.2.7	Primary Subrack – USA and USB Feeds.....	4-36
4.4.2.8	Extension Subrack – USA and USB Feeds.....	4-36
4.4.2.9	DP Cell Power Supplies.....	4-36
4.4.2.10	TC514 Fiber Optic Modems	4-37
4.4.2.11	Cabinet Door Switches	4-37
4.4.3	Cabling.....	4-37
SECTION 5	INTERFACES AND COMMUNICATIONS.....	5-1
5.1	MTP DATA LINK.....	5-1
5.2	AF100 BUS COMMUNICATION.....	5-1
SECTION 6	GROUNDING AND COOLING REQUIREMENTS.....	6-1
6.1	EARTHING SCHEME.....	6-1
6.2	CABINET/COMPONENT COOLING	6-1
6.3	CABINET LOAD BREAKDOWN	6-2

TABLE OF CONTENTS (Cont'd)

LIST OF TABLES

Table	Title	Page
Table 4.4-1. [] ^{a,c}	4-14
Table 4.4-2. [] ^{ac}	4-16
Table 4.4-3. [] ^{a, c}	4-17
Table 4.4-4. [] ^{a,c}	4-19
Table 4.4-5. [] ^{a,c}	4-19
Table 4.4-6. [] ^{a,c}	4-20
Table 4.4-7A. [] ^{a,c}	4-22
Table 4.4-7B. [] ^{a,c}	4-23
Table 4.4-8A. [] ^{a,c}	4-24
Table 4.4-8B. [] ^{a,c}	4-25
Table 4.4-9A. [] ^{a,c}	4-26
Table 4.4-9B. [] ^{a,c}	4-27
Table 4.4-10A. [] ^{a,c}	4-28
Table 4.4-10B. [] ^{a,c}	4-29
Table 6.3-1. [] ^{a,c}	6-2

LIST OF FIGURES

Figure	Title	Page
Figure 2.1-1. [] ^{a,c}	2-2
Figure 4.1-1. [] ^{a,c}	4-2
Figure 4.2-1. [] ^{a,c}	4-4
Figure 4.2-2. [] ^{a,c}	4-8
Figure 4.4-1. [] ^{a,c}	4-31
Figure 5.2-1. [] ^{a,c}	5-2

ACRONYMS AND TRADEMARKS

Acronyms used in the document are defined in WNA-PS-00016-GEN, “Standard Acronyms and Definitions” (Reference 4), or included below to ensure unambiguous understanding of their use within this document.

Acronyms	Definition
AC	Alternating Current
AI	Analog Input
AO	Analog Output
d/p	Differential Pressure
DC	Direct Current
DI	Digital Input
DO	Digital Output
DP	Differential Pressure Transducer
FE	Function Enable
FOM	Fiber Optic Modem
FPD	Flat Panel Display
HISCH	Hydraulic Isolator Status Contact (Head)
HISCHL	Hydraulic Isolator Status Contact (Hot Leg)
HISCS	Hydraulic Isolator Status Contact (Seal Table)
HMI	Human Machine Interface
ICC	Inadequate Core Cooling
IRP	Interposing Relay Panel
MTP	Maintenance and Test Panel
OM	Operator’s Module
PAMS	Post Accident Monitoring System
PS	Power Supply
RCS	Reactor Coolant System
RTD	Resistance Temperature Detector
RVLIS	Reactor Vessel Level Instrumentation System
SLE	Software Load Enable
TC	Thermocouple
TRBL	Trouble
TU	Termination Unit
WDT	Watchdog Timer

Advant[®] is a registered trademark of ABB Process Automation Corporation.

IBM[®] is a trademark of International Business Machines Corporation in the United States, other countries, or both.

QNX[®] is a registered trademark of QNX Software Systems GmbH & Co. KG ("QSSKG") and is used under license by QSS.

ACRONYMS AND TRADEMARKS (Cont'd)

All other product and corporate names used in this document may be trademarks or registered trademarks of other companies, and are used only for explanation and to the owners' benefit, without intent to infringe.

GLOSSARY OF TERMS

Standard terms used in the document are defined in WNA-PS-00016-GEN, “Standard Acronyms and Definitions” (Reference 4), or included below to ensure unambiguous understanding of their use within this document.

Term	Definitions
-------------	--------------------

None.	
-------	--

REFERENCES

Following is a list of references used throughout this document.

1. WNA-DS-01617-WBT-P, Rev. 4, “Watts Bar Unit 2 Post Accident Monitoring System - System Requirements Specification,” Westinghouse Electric Company LLC.
2. 00000-ICE-30155, Rev. 9, “System Requirements Specification for the Common Q Generic Flat Panel Display,” Westinghouse Electric Company LLC.
3. 00000-ICE-30159, Rev. 02, “Hardware Requirements Specification for the Common Q Power Supply System,” Westinghouse Electric Company LLC.
4. WNA-PS-00016-GEN, Rev.5, “Standard Acronyms and Definitions,” Westinghouse Electric Company LLC.
5. Regulatory Guide 1.75, Rev. 02, “Physical Independence of Electrical Systems,” Nuclear Regulatory Commission.
6. IEEE 384-1992, “Standard Criteria for Independence of Class 1E Equipment and Circuits,” Institute of Electrical and Electronics Engineers, 1992.
7. IEEE 383-2003, “Standard for Type Test of Class 1E Electric Cables, Field Splices, and Connections for Nuclear Power Generating Stations,” Institute of Electrical and Electronics Engineers, 2003.
8. Deleted.
9. Deleted.
10. 2E10022, Rev. 4, “Safety System Standard 7721 Seismic Cabinet,” Westinghouse Electric Company LLC.

REQUIREMENTS

Design and/or other requirements have been identified in this document. Following is a list of the requirement numbers and the document page on which the requirement is identified.

SDS2.2-1	2-1	SDS4.3.1-1	4-11
SDS3.1-1	3-1	SDS4.3.1-2	4-11
SDS3.2-1	3-1	SDS4.3.1-3	4-11
SDS3.3-1	3-1	R4.3.1-1	4-11
SDS4.2.1-1	4-3	R4.3.1-2	4-12
SDS4.2.1-2	4-3	R4.3.1-3	4-12
SDS4.2.1-3	4-3	R4.4-1	4-13
SDS4.2.1-4	4-3	R4.4.1.1-1	4-13
SDS4.2.1-5	4-3	SDS4.4.1.1-1	4-13
SDS4.2.1-6	4-3	R4.4.1.1-2	4-13
R4.2.1.1-1	4-5	SDS4.4.1.2-1	4-13
SDS4.2.1.1-1	4-5	SDS4.4.1.2-2	4-13
SDS4.2.1.1-2	4-5	SDS4.4.1.2-3	4-14
SDS4.2.1.1-3	4-5	SDS4.4.1.2-4	4-14
SDS4.2.1.1-4	4-5	R4.4.1.2-1	4-14
SDS4.2.1.1-5	4-5	SDS4.4.1.2-5	4-15
R4.2.1.2-1	4-5	R4.4.1.2-2	4-15
R4.2.1.2-2	4-5	R4.4.1.2-3	4-15
R4.2.1.2-3	4-5	SDS4.4.1.2-6	4-18
R4.2.1.2-4	4-6	R4.4.1.2-4	4-18
R4.2.1.2-5	4-6	R4.4.1.2-5	4-18
SDS4.2.1.2-1	4-6	SDS4.4.1.2-7	4-18
SDS4.2.1.2-2	4-6	SDS4.4.1.2-8	4-18
SDS4.2.1.3-1	4-9	SDS4.4.1.2-9	4-20
SDS4.2.1.3-2	4-9	R4.4.1.2-6	4-20
R4.2.1.3-1	4-9	SDS4.4.1.2-10	4-22
SDS4.2.1.3-3	4-9	R4.4.1.2-7	4-22
R4.2.1.3-2	4-9	R4.4.1.2-8	4-24
R4.2.1.3-3	4-9	R4.4.1.2-9	4-26
R4.2.1.3-4	4-9	R4.4.1.2-10	4-28
R4.2.1.3-5	4-9	R4.4.1.3-1	4-29
R4.2.1.3-6	4-9	SDS4.4.1.4-1	4-30
R4.2.1.4-1	4-10	R4.4.1.5-1	4-30
R4.2.1.4-2	4-10	SDS4.4.1.5-1	4-30
R4.2.1.4-3	4-10	SDS4.4.1.5-2	4-30
R4.2.1.4-4	4-10	R4.4.1.5-2	4-30
R4.2.1.4-5	4-10	SDS4.4.1.5-3	4-30
R4.2.1.4-6	4-10	R4.4.1.5-3	4-30
R4.2.2-1	4-11	R4.4.1.5-4	4-30
SDS4.3-1	4-11	R4.4.1.5-5	4-30
R4.3-1	4-11	R4.4.1.5-6	4-31

R4.4.1.5-7	4-31	R4.4.3-3	4-37
R4.4.1.5-8	4-31	R4.4.3-4	4-37
SDS4.4.1.5-12	4-31	R4.4.3-5	4-38
SDS4.4.1.5-13	4-32	R4.4.3-6	4-38
SDS4.4.1.5-14	4-32	R4.4.3-7	4-38
R4.4.1.5-9	4-32	R4.4.3-8	4-38
SDS4.4.2.1-1	4-32	SDS4.4.3-1	4-38
SDS4.4.2.1-2	4-32	R4.4.3-9	4-38
SDS4.4.2.1-3	4-33	R4.4.3-10	4-38
SDS4.4.2.1-4	4-33	R4.4.3-11	4-38
SDS4.4.2.1-5	4-33	R4.4.3-12	4-38
SDS4.4.2.1-6	4-33	R4.4.3-13	4-38
SDS4.4.2.1-7	4-33	R4.4.3-14	4-39
R4.4.2.1-1	4-33	R4.4.3-15	4-39
R4.4.2.1-2	4-33	R4.4.3-16	4-39
R4.4.2.1-3	4-33	R4.4.3-17	4-39
R4.4.2.1-4	4-33	R4.4.3-18	4-39
R4.4.2.2-1	4-34	R4.4.3-19	4-39
SDS4.4.2.2-1	4-34	R4.4.3-20	4-39
R4.4.2.2-2	4-34	R4.4.3-21	4-39
SDS4.4.2.2-2	4-34	R4.4.3-22	4-39
R4.4.2.3-1	4-34	SDS5.1-1	5-1
R4.4.2.3-2	4-34	R5.1-1	5-1
SDS4.4.2.3-1	4-34	SDS5.2-1	5-1
SDS4.4.2.3-2	4-34	SDS5.2-2	5-1
R4.4.2.4-1	4-34	SDS5.2-3	5-1
R4.4.2.4-2	4-34	R5.2-1	5-3
R4.4.2.4-3	4-35	R5.2-2	5-3
R4.4.2.5-1	4-35	R5.2-3	5-3
R4.4.2.6-1	4-35	R5.2-4	5-3
R4.4.2.6-2	4-35	R5.2-5	5-4
R4.4.2.6-3	4-35	R6.1-1	6-1
R4.4.2.6-4	4-35	R6.1-2	6-1
R4.4.2.6-5	4-36	R6.1-3	6-1
R4.4.2.6-6	4-36	R6.1-4	6-1
R4.4.2.7-1	4-36	R6.2-1	6-1
R4.4.2.7-2	4-36	R6.2-2	6-2
R4.4.2.8-1	4-36	SDS6.3-1	6-2
R4.4.2.8-2	4-36		
R4.4.2.9-1	4-36		
R4.4.2.10-1	4-37		
R4.4.2.10-2	4-37		
SDS4.4.2.10-1	4-37		
SDS4.4.2.11-1	4-37		
R4.4.3-1	4-37		
R4.4.3-2	4-37		

(Last Page of Front Matter)

SECTION 1 INTRODUCTION

1.1 PURPOSE

The purpose of this document is to define the hardware design requirements and provide a high-level hardware description for the Watts Bar Unit 2 Post Accident Monitoring System (PAMS).

The hardware design requirements are necessary for the PAMS implementation specified in WNA-DS-01617-WBT, “Post Accident Monitoring System - System Requirements Specification” (Reference 1).

1.2 SCOPE

This document defines the physical hardware configuration necessary to implement the requirements provided in Reference 1.

1.3 FORMAT OF THE DOCUMENT

1.3.1 Requirement Compliance

When showing compliance to a higher tiered requirement, the specified document and requirement number are presented in () following the associated design specification text. The following references are used through this document:

(*SysRS R##### - ##*) or (*SysRS Section ####*) is Reference 1, WNA-DS-01617-WBT-P, Rev. 4, “Watts Bar Unit 2 Post Accident Monitoring System - System Requirements Specification,” Westinghouse Electric Company LLC.

(*FPD R##### - ##*) or (*FPD Section####*) is Reference 2, 00000-ICE-30155, Rev. 9, “System Requirements Specification for the Common Q Generic Flat Panel Display,” Westinghouse Electric Company LLC.

(*PS Section####*) is Reference 3, 00000-ICE-30159, Rev. 02, “Hardware Requirements Specification for the Common Q Power Supply System,” Westinghouse Electric Company LLC.

1.3.2 Requirements Specification Format

System requirements are specified throughout this document and are presented in the following format to clearly distinguish them from other text.

R### - ##

[Requirement text.]

Guidance: Guidance text.

Rationale: Rationale text.

Each requirement is uniquely numbered, although the numbers may not necessarily be in order. It is the intent that, in future revisions of this document, requirements retain their original number. New requirements are assigned a new, unique number.

Some requirements are new design requirements originating in this document and hence do not need requirement traceability. Other requirements that may need traceability are referenced in the following format.

(Reference X R####) or (Reference X Section ###)

1.3.3 Design Statement Format

Design statements are specified throughout this document and are presented in the following format to clearly distinguish them from other text.

SDS### - ##

[Design statement text (Requirement ID or Section).]

Guidance: Guidance text.

Rationale: Rationale text.

Each design statement is uniquely numbered, although the numbers may not necessarily be in order. It is the intent that, in future revisions of this document, design statements retain their original number. New design statements are assigned a new, unique number.

All the design statements are traced to their requirement statements in the following format.

*(SysRS R##### - ##), (SysRS Section #####), (FPD R##### - ##), (FPD Section#####), (PS Section#####)
(Reference X R####) or (Reference X Section ###)*

SECTION 2 PAMS ARCHITECTURE DESCRIPTION

2.1 PAMS OVERVIEW

The Watts Bar Unit 2 PAMS consists of two separate Class 1E trains that are built on an Advant[®] Controller 160 (AC160) platform. Each train of PAMS has a flat panel display (FPD) for its operator's module (OM) and maintenance and test panel (MTP).

The system requirements specification for the FPD is provided in 00000-ICE-30155, Rev. 9, "System Requirements Specification for the Common Q Generic Flat Panel Display," Westinghouse Electric Company LLC. (Reference 2).

Each train is mounted in a dedicated cabinet, with identical hardware. Therefore, the following discussion addresses the hardware requirements of a single PAMS train. Any differences in the hardware configuration for Train A and Train B will be described explicitly.

2.2 PAMS ARCHITECTURE

SDS2.2-1

[The major subsystems included in each train of the Watts Bar Unit 2 PAMS are as follows (*SysRS R3.1.2-2*), (*SysRS R3.1.3-1*), (*SysRS R3.3.2-1*), (*SysRS 3.3.2-2*):

1. AC160 rack – Two per train
2. MTP – One per train
3. OM – One per train]

Guidance: Figure 2.1-1, "PAMS Architecture," shows the basic architecture of the Watts Bar Unit 2 PAMS. The train A of Watts Bar Unit 2 PAMS is electrically independent and physically isolated from the train B, so as to meet the separation requirement of regulatory guide 1.75, "physical independence of electrical systems" (Reference 5) and IEEE 384-1992, "standard criteria for independence of class 1E equipment and circuits" (Reference 6).




Figure 2.1-1. []^{a,c}

(Last Page of Section 2)

SECTION 3 PAMS FUNCTIONALITY

3.1 PAMS FUNCTIONALITY OVERVIEW

SDS3.1-1

[The PAMS performs post accident monitoring functions such as reactor vessel level monitoring, subcooled margin monitoring, and core exit thermocouple (CET) monitoring. (SysRS R2.3.1-1)]

3.2 MTP FUNCTIONALITY

SDS3.2-1

[The MTP, located in each PAMS train, provides the human machine interface (HMI) that is used for maintenance, test, and internal alarm functions. (SysRS R2.6.1-4), (SysRS R2.8-1)]

Guidance: The MTP provides displays in support of the following activities:

- Surveillance testing displays to verify PAMS operability
- Maintenance displays to support corrective maintenance activities
- Setpoint displays to provide the capability to monitor, change, load, and save setpoints (adjustable parameters)
- System status displays to provide detailed PAMS status and diagnostics information
- System health displays to provide diagnostic monitoring information for the AC160 processor module, communication interface module, input modules, and output modules
- Operational displays to monitor PAMS operational status

3.3 OM FUNCTIONALITY

SDS3.3-1

a,c

Guidance: The OM is equipped with the FE keyswitch but not the SLE keyswitch.

SECTION 4

PAMS HARDWARE CONFIGURATION

4.1 PAMS HARDWARE CONFIGURATION OVERVIEW

The Watts Bar Unit 2 PAMS cabinet includes the following hardware as shown in Figure 4.1-1.

a,c




Figure 4.1-1. []^{a,c}

4.2 PAMS CABINET

The PAMS cabinet should have the following features.

4.2.1 Cabinet Layout

SDS4.2.1-1

[The Watts Bar Unit 2 PAMS is housed in a standard Westinghouse cabinet that is seismically qualified.
(Reference 10, G04)]

Guidance: The overall dimension of the Watts Bar Unit 2 PAMS cabinet is 87”h X 28”w X 29”d. The height of the cabinet includes a 4 inch base. A basic layout of the Watts Bar Unit 2 PAMS cabinet is depicted in Figure 4.2-1.

SDS4.2.1-2

[The Watts Bar Unit 2 PAMS cabinet is designed to accommodate top cable entry. (SysRS R3.1.1-6)]

SDS4.2.1-3

[] a,c

SDS4.2.1-4

[] a,c

SDS4.2.1-5

[] a,c

SDS4.2.1-6

[] a,c

a,c

Figure 4.2-1. [

] a,c

4.2.1.1 Common Q Power Supply Layout

R4.2.1.1-1

a,c

SDS4.2.1.1-1

a,c

SDS4.2.1.1-2

a,c

SDS4.2.1.1-3

a,c

SDS4.2.1.1-4

a,c

SDS4.2.1.1-5

a,c

4.2.1.2 RF616 Primary Subrack Layout

R4.2.1.2-1

a,c

R4.2.1.2-2

a,c

R4.2.1.2-3

a,c

a,c

R4.2.1.2-4

a,c

R4.2.1.2-5

a,c

SDS4.2.1.2-1

a,c

SDS4.2.1.2-2

a,c

a,c



a,c

Figure 4.2-2. [

] a,c

4.2.1.3 MTP Layout

SDS4.2.1.3-1

a.c

SDS4.2.1.3-2

a.c

R4.2.1.3-1

a.c

SDS4.2.1.3-3

a.c

R4.2.1.3-2

a.c

R4.2.1.3-3

a.c

R4.2.1.3-4

a.c

R4.2.1.3-5

a.c

R4.2.1.3-6

a.c

4.2.1.4 RF620 Extension Subrack Layout

R4.2.1.4-1

a,c

R4.2.1.4-2

a,c

R4.2.1.4-3

a,c

R4.2.1.4-4

a,c

R4.2.1.4-5

a,c

R4.2.1.4-6

a,c

4.2.2 Cabinet Numbering

R4.2.2-1

[As per TVA requirement, the two cabinets for Train A and Train B shall be numbered 2-R-179 and 2-R-180 respectively with temporary labels.]

Guidance: Affix temporary labels to both the front and back doors of both cabinets. Install labels in the same location as to where the final cabinet labels will be installed.

4.3 MTP/OM CONFIGURATION

SDS4.3-1

[] a,c

R4.3-1

[] a,c

4.3.1 Keylock Switches

SDS4.3.1-1

[] a,c

SDS4.3.1-2

[] a,c

SDS4.3.1-3

[] a,c

R4.3.1-1

[] a,c

R4.3.1-2

a,c

R4.3.1-3

a,c

4.4 HARDWARE DESCRIPTION

R4.4-1

a,c



The Common Qualified Platform (Common Q) line of qualified hardware is used to implement the Watts Bar Unit 2 PAMS subsystems, cabinets, cablings, and other related equipment.

As appropriate, additional detailed hardware design requirement documents are provided for individual hardware components.

4.4.1 Common Q Qualified Hardware

The following standard Common Q hardware is used for the Watts Bar Unit 2 PAMS:

- Cabinet
- AC160 Modules
- I/O Termination Units
- FPD System
- Power Supply System

4.4.1.1 Cabinet

R4.4.1.1-1

a,c



SDS4.4.1.1-1



a,c

R4.4.1.1-2

a,c



4.4.1.2 AC160 Modules

SDS4.4.1.2-1



a,c

SDS4.4.1.2-2



a,c

$$[\quad]$$
 $\mathbf{I}^{a,c}$ [illegible]

$$J^{a,c}$$
[illegible]

a.c

a.c

a,c

I^{ac}

[illegible]

1^a, c

a,c

[illegible]

SDS4.4.1.2-6

a,c

R4.4.1.2-4

a,c

R4.4.1.2-5

a,c

SDS4.4.1.2-7

a,c

SDS4.4.1.2-8

a,c

Table 4.4-4. [

] ^{a,c}

a,c

Table 4.4-5. [

] ^{a,c}

a,c

a.c

a,c
$$J^{a,c}$$

a,c

[illegible]

$$J^{a,c}$$

a,c

[illegible]

a,c

a,c

1^{a,c}

a,c

[illegible]

$$I^{a,c}$$

a,c

[illegible]

a.c

1^{a,c}

a,c

[illegible]

a,c

[illegible]

a.c

a,c

[illegible]

$$]^{a,c}$$

a,c

[illegible]

a.c

 $\mathbf{I}^{a,c}$

a,c

[illegible]

Table 4.4-10B. [

] ^{a,c}

a,c

4.4.1.3 I/O Termination Units

R4.4.1.3-1

a,c

4.4.1.4 FPD System

SDS4.4.1.4-1

a,c

4.4.1.5 Power Supply System

R4.4.1.5-1

a,c

SDS4.4.1.5-1

a,c

SDS4.4.1.5-2

a,c

R4.4.1.5-2

a,c

SDS4.4.1.5-3

a,c

R4.4.1.5-3

a,c

R4.4.1.5-4

a,c

R4.4.1.5-5

a,c

R4.4.1.5-6

a,c

R4.4.1.5-7

a,c

R4.4.1.5-8

a,c

a,c

Figure 4.4-1. [

] a,c

SDS4.4.1.5-12

a,c

[] a,c

SDS4.4.1.5-13 [] a,c

SDS4.4.1.5-14 [] a,c

R4.4.1.5-9 [] a,c

4.4.2 PAMS Standard Hardware Subassemblies

4.4.2.1 Interposing Relay Panel (IRP)

SDS4.4.2.1-1 [] a,c

SDS4.4.2.1-2 [] a,c

SDS4.4.2.1-3

a,c

SDS4.4.2.1-4

a,c

SDS4.4.2.1-5

a,c

SDS4.4.2.1-6

a,c

SDS4.4.2.1-7

a,c

R4.4.2.1-1

a,c

R4.4.2.1-2

a,c

R4.4.2.1-3

a,c

R4.4.2.1-4

a,c

4.4.2.2 Cabinet Temperature Sensors

R4.4.2.2-1 a,c
[]

SDS4.4.2.2-1 a,c
[]

R4.4.2.2-2 a,c
[]

SDS4.4.2.2-2 a,c
[]

4.4.2.3 Field Terminal Blocks

R4.4.2.3-1 a,c
[]

R4.4.2.3-2 a,c
[]

SDS4.4.2.3-1 a,c
[]

SDS4.4.2.3-2 a,c
[]

4.4.2.4 Input Power Distribution Breaker Panel (AC)

R4.4.2.4-1 a,c
[]

R4.4.2.4-2 a,c
[]

R4.4.2.4-3

a,c

4.4.2.5 DC Distribution Breaker Assembly

R4.4.2.5-1

a,c

4.4.2.6 Auxiliary Power Supply

R4.4.2.6-1

a,c

R4.4.2.6-2

a,c

R4.4.2.6-3

a,c

R4.4.2.6-4

a,c

R4.4.2.6-5

a,c

R4.4.2.6-6

a,c

4.4.2.7 Primary Subrack – USA and USB Feeds

R4.4.2.7-1

a,c

R4.4.2.7-2

a,c

4.4.2.8 Extension Subrack – USA and USB Feeds

R4.4.2.8-1

a,c

R4.4.2.8-2

a,c

4.4.2.9 DP Cell Power Supplies

R4.4.2.9-1

a,c

4.4.2.10 TC514 Fiber Optic Modems

R4.4.2.10-1 a,c
[]

R4.4.2.10-2 a,c
[]

SDS4.4.2.10-1 a,c
[]

4.4.2.11 Cabinet Door Switches

SDS4.4.2.11-1 a,c
[]

4.4.3 Cabling

R4.4.3-1 a,c
[]

R4.4.3-2 a,c
[]

R4.4.3-3 a,c
[]

R4.4.3-4 a,c
[]

R4.4.3-5

a,c

R4.4.3-6

a,c

R4.4.3-7

a,c

R4.4.3-8

a,c

SDS4.4.3-1

a,c

R4.4.3-9

a,c

R4.4.3-10

a,c

R4.4.3-11

a,c

R4.4.3-12

a,c

R4.4.3-13

a,c

R4.4.3-14		a,c
<input type="checkbox"/>		<input type="checkbox"/>
R4.4.3-15		a,c
<input type="checkbox"/>		<input type="checkbox"/>
R4.4.3-16		a,c
<input type="checkbox"/>		<input type="checkbox"/>
R4.4.3-17		a,c
<input type="checkbox"/>		<input type="checkbox"/>
R4.4.3-18		a,c
<input type="checkbox"/>		<input type="checkbox"/>
R4.4.3-19	a,c	
<input type="checkbox"/>	<input type="checkbox"/>	
R4.4.3-20		a,c
<input type="checkbox"/>		<input type="checkbox"/>
R4.4.3-21		a,c
<input type="checkbox"/>		<input type="checkbox"/>
R4.4.3-22		a,c
<input type="checkbox"/>		<input type="checkbox"/>

SECTION 5 INTERFACES AND COMMUNICATIONS

5.1 MTP DATA LINK

SDS5.1-1

a,c

R5.1-1

a,c

5.2 AF100 BUS COMMUNICATION

SDS5.2-1

a,c

SDS5.2-2

a,c

SDS5.2-3

a,c




Figure 5.2-1. []^{a,c}

R5.2-1

a,c

R5.2-2

a,c

R5.2-3

a,c

R5.2-4

a,c

R5.2-5

a,c



(Last Page of Section 5)

6.1 EARTHING SCHEME

R6.1-2 **a.c**

R6.1-4	a.c

6.2 CABINET/COMPONENT COOLING

R6.2-1	a,c
--------	-----

a,c

a,c

$$J^{a,c}$$
[illegible]

Attachment 14

Westinghouse Electric Company CAW-11-3108, Application for Withholding Proprietary Information from Public Disclosure, WNA-DS-01667-WBT-P, Revision 4, "Post Accident Monitoring System - System Design Specification" (Proprietary), Dated February 11, 2011



Westinghouse Electric Company
Nuclear Services
1000 Westinghouse Drive
Cranberry Township, Pennsylvania 16066
USA

U.S. Nuclear Regulatory Commission
Document Control Desk
11555 Rockville Pike
Rockville, MD 20852

Direct tel: (412) 374-4643
Direct fax: (724) 720-0754
e-mail: greshaja@westinghouse.com
Proj letter: WBT-D-2916

CAW-11-3108

February 11, 2011

APPLICATION FOR WITHHOLDING PROPRIETARY
INFORMATION FROM PUBLIC DISCLOSURE

Subject: WNA-DS-01667-WBT-P, Rev. 4, "Post Accident Monitoring System – System Design Specification" (Proprietary)

The proprietary information for which withholding is being requested in the above-referenced report is further identified in Affidavit CAW-11-3108 signed by the owner of the proprietary information, Westinghouse Electric Company LLC. The affidavit, which accompanies this letter, sets forth the basis on which the information may be withheld from public disclosure by the Commission and addresses with specificity the considerations listed in paragraph (b)(4) of 10 CFR Section 2.390 of the Commission's regulations.

Accordingly, this letter authorizes the utilization of the accompanying affidavit by Tennessee Valley Authority.

Correspondence with respect to the proprietary aspects of the application for withholding or the Westinghouse affidavit should reference this letter, CAW-11-3108, and should be addressed to J. A. Gresham, Manager, Regulatory Compliance, Westinghouse Electric Company LLC, Suite 428, 1000 Westinghouse Drive, Cranberry Township, Pennsylvania 16066.

Very truly yours,

A handwritten signature in black ink, appearing to read 'J. A. Gresham', with a long, sweeping horizontal line extending to the right.
J. A. Gresham, Manager
Regulatory Compliance

Enclosures


AFFIDAVIT

COMMONWEALTH OF PENNSYLVANIA:

SS

COUNTY OF BUTLER:

Before me, the undersigned authority, personally appeared J. A. Gresham, who, being by me duly sworn according to law, deposes and says that he is authorized to execute this Affidavit on behalf of Westinghouse Electric Company LLC (Westinghouse), and that the averments of fact set forth in this Affidavit are true and correct to the best of his knowledge, information, and belief:

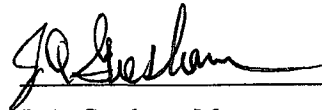

J. A. Gresham, Manager
Regulatory Compliance

Sworn to and subscribed before me
this 11th day of February 2011



Notary Public

COMMONWEALTH OF PENNSYLVANIA

Notarial Seal
Cynthia Olesky, Notary Public
Manor Boro, Westmoreland County
My Commission Expires July 16, 2014
Member: Pennsylvania Association of Notaries

- (1) I am Manager, Regulatory Compliance, in Nuclear Services, Westinghouse Electric Company LLC (Westinghouse), and as such, I have been specifically delegated the function of reviewing the proprietary information sought to be withheld from public disclosure in connection with nuclear power plant licensing and rule making proceedings, and am authorized to apply for its withholding on behalf of Westinghouse.
- (2) I am making this Affidavit in conformance with the provisions of 10 CFR Section 2.390 of the Commission's regulations and in conjunction with the Westinghouse Application for Withholding Proprietary Information from Public Disclosure accompanying this Affidavit.
- (3) I have personal knowledge of the criteria and procedures utilized by Westinghouse in designating information as a trade secret, privileged or as confidential commercial or financial information.
- (4) Pursuant to the provisions of paragraph (b)(4) of Section 2.390 of the Commission's regulations, the following is furnished for consideration by the Commission in determining whether the information sought to be withheld from public disclosure should be withheld.
 - (i) The information sought to be withheld from public disclosure is owned and has been held in confidence by Westinghouse.
 - (ii) The information is of a type customarily held in confidence by Westinghouse and not customarily disclosed to the public. Westinghouse has a rational basis for determining the types of information customarily held in confidence by it and, in that connection, utilizes a system to determine when and whether to hold certain types of information in confidence. The application of that system and the substance of that system constitutes Westinghouse policy and provides the rational basis required.

Under that system, information is held in confidence if it falls in one or more of several types, the release of which might result in the loss of an existing or potential competitive advantage, as follows:

- (a) The information reveals the distinguishing aspects of a process (or component, structure, tool, method, etc.) where prevention of its use by any of

Westinghouse's competitors without license from Westinghouse constitutes a competitive economic advantage over other companies.

- (b) It consists of supporting data, including test data, relative to a process (or component, structure, tool, method, etc.), the application of which data secures a competitive economic advantage, e.g., by optimization or improved marketability.
- (c) Its use by a competitor would reduce his expenditure of resources or improve his competitive position in the design, manufacture, shipment, installation, assurance of quality, or licensing a similar product.
- (d) It reveals cost or price information, production capacities, budget levels, or commercial strategies of Westinghouse, its customers or suppliers.
- (e) It reveals aspects of past, present, or future Westinghouse or customer funded development plans and programs of potential commercial value to Westinghouse.
- (f) It contains patentable ideas, for which patent protection may be desirable.

There are sound policy reasons behind the Westinghouse system which include the following:

- (a) The use of such information by Westinghouse gives Westinghouse a competitive advantage over its competitors. It is, therefore, withheld from disclosure to protect the Westinghouse competitive position.
- (b) It is information that is marketable in many ways. The extent to which such information is available to competitors diminishes the Westinghouse ability to sell products and services involving the use of the information.
- (c) Use by our competitor would put Westinghouse at a competitive disadvantage by reducing his expenditure of resources at our expense.

- (d) Each component of proprietary information pertinent to a particular competitive advantage is potentially as valuable as the total competitive advantage. If competitors acquire components of proprietary information, any one component may be the key to the entire puzzle, thereby depriving Westinghouse of a competitive advantage.
 - (e) Unrestricted disclosure would jeopardize the position of prominence of Westinghouse in the world market, and thereby give a market advantage to the competition of those countries.
 - (f) The Westinghouse capacity to invest corporate assets in research and development depends upon the success in obtaining and maintaining a competitive advantage.
-
- (iii) The information is being transmitted to the Commission in confidence and, under the provisions of 10 CFR Section 2.390; it is to be received in confidence by the Commission.
 - (iv) The information sought to be protected is not available in public sources or available information has not been previously employed in the same original manner or method to the best of our knowledge and belief.
 - (v) The proprietary information sought to be withheld in this submittal is that which is appropriately marked in WNA-DS-01667-WBT-P, Rev. 4, "Post Accident Monitoring System – System Design Specification" (Proprietary), dated February 2011 for submittal to the Commission, being transmitted by Tennessee Valley Authority Watts Bar Unit 2 letter and Application for Withholding Proprietary Information from Public Disclosure, to the Document Control Desk. The proprietary information as submitted by Westinghouse is that associated with the system requirements for the Post Accident Monitoring System and may be used only for that purpose.

This information is part of that which will enable Westinghouse to:

- (a) Support Tennessee Valley Authority in licensing and constructing a reliable Post Accident Monitoring System at Watts Bar Unit 2.
- (b) Remain competitive in the marketplace.

Further this information has substantial commercial value as follows:

- (a) Westinghouse plans to sell the use of similar information to its customers for purpose of licensing and constructing Westinghouse-designed Post Accident Monitoring System.
- (b) Westinghouse can sell support and defense of the design, construction and operations of the system.
- (c) The information requested to be withheld reveals the distinguishing aspects of a methodology which was developed by Westinghouse.

Public disclosure of this proprietary information is likely to cause substantial harm to the competitive position of Westinghouse because it would enhance the ability of competitors to provide similar design and licensing defense services for commercial power reactors without commensurate expenses. Also, public disclosure of the information would enable others to use the information to meet NRC requirements for licensing documentation without purchasing the right to use the information.

The development of the technology described in part by the information is the result of applying the results of many years of experience in an intensive Westinghouse effort and the expenditure of a considerable sum of money.

In order for competitors of Westinghouse to duplicate this information, similar technical programs would have to be performed and a significant manpower effort, having the requisite talent and experience, would have to be expended.

Further the deponent sayeth not.

PROPRIETARY INFORMATION NOTICE

Transmitted herewith are proprietary and/or non-proprietary versions of documents furnished to the NRC in connection with requests for generic and/or plant-specific review and approval.

In order to conform to the requirements of 10 CFR 2.390 of the Commission's regulations concerning the protection of proprietary information so submitted to the NRC, the information which is proprietary in the proprietary versions is contained within brackets, and where the proprietary information has been deleted in the non-proprietary versions, only the brackets remain (the information that was contained within the brackets in the proprietary versions having been deleted). The justification for claiming the information so designated as proprietary is indicated in both versions by means of lower case letters (a) through (f) located as a superscript immediately following the brackets enclosing each item of information being identified as proprietary or in the margin opposite such information. These lower case letters refer to the types of information Westinghouse customarily holds in confidence identified in Sections (4)(ii)(a) through (4)(ii)(f) of the affidavit accompanying this transmittal pursuant to 10 CFR 2.390(b)(1).

COPYRIGHT NOTICE

The reports transmitted herewith each bear a Westinghouse copyright notice. The NRC is permitted to make the number of copies of the information contained in these reports which are necessary for its internal use in connection with generic and plant-specific reviews and approvals as well as the issuance, denial, amendment, transfer, renewal, modification, suspension, revocation, or violation of a license, permit, order, or regulation subject to the requirements of 10 CFR 2.390 regarding restrictions on public disclosure to the extent such information has been identified as proprietary by Westinghouse, copyright protection notwithstanding. With respect to the non-proprietary versions of these reports, the NRC is permitted to make the number of copies beyond those necessary for its internal use which are necessary in order to have one copy available for public viewing in the appropriate docket files in the public document room in Washington, DC and in local public document rooms as may be required by NRC regulations if the number of copies submitted is insufficient for this purpose. Copies made by the NRC must include the copyright notice in all instances and the proprietary notice if the original was identified as proprietary.

Tennessee Valley Authority

Letter for Transmittal to the NRC

The following paragraphs should be included in your letter to the NRC:

Enclosed are:

1. 2 copies of WNA-DS-01667-WBT-P, Rev. 4, "Post Accident Monitoring System – System Design Specification" (Proprietary)
2. 2 copies of WNA-DS-01667-WBT-NP, Rev. 4, "Post Accident Monitoring System – System Design Specification" (Non-Proprietary)

Also enclosed is the Westinghouse Application for Withholding Proprietary Information from Public Disclosure CAW-11-3108 accompanying Affidavit, Proprietary Information Notice, and Copyright Notice.

As Item 1 contains information proprietary to Westinghouse Electric Company LLC, it is supported by an affidavit signed by Westinghouse, the owner of the information. The affidavit sets forth the basis on which the information may be withheld from public disclosure by the Commission and addresses with specificity the considerations listed in paragraph (b)(4) of Section 2.390 of the Commission's regulations.

Accordingly, it is respectfully requested that the information which is proprietary to Westinghouse be withheld from public disclosure in accordance with 10 CFR Section 2.390 of the Commission's regulations.

Correspondence with respect to the copyright or proprietary aspects of the items listed above or the supporting Westinghouse affidavit should reference CAW-11-3108 and should be addressed to J. A. Gresham, Manager, Regulatory Compliance, Westinghouse Electric Company LLC, Suite 428, 1000 Westinghouse Drive, Cranberry Township, Pennsylvania 16066.